


**HEAVY DUTY SURFACE MOUNT
MAGNETIC CONTACT
1000-65 SERIES**



FEATURES:

- * 3 1/2" Heavy Duty Magnetic Contact
- * Solid Aluminum Case
- * 18" Armored Cable with #22 AWG Wire Leads
- * Epoxy Sealed for maximum resistance to harsh environments
- * E.O.L. Resistors, Diodes, Supervisory Loops and Private Labeling Available
- * High Security Balanced Magnetic Configuration Available
- * Lifetime warranty
- * Safety Approvals

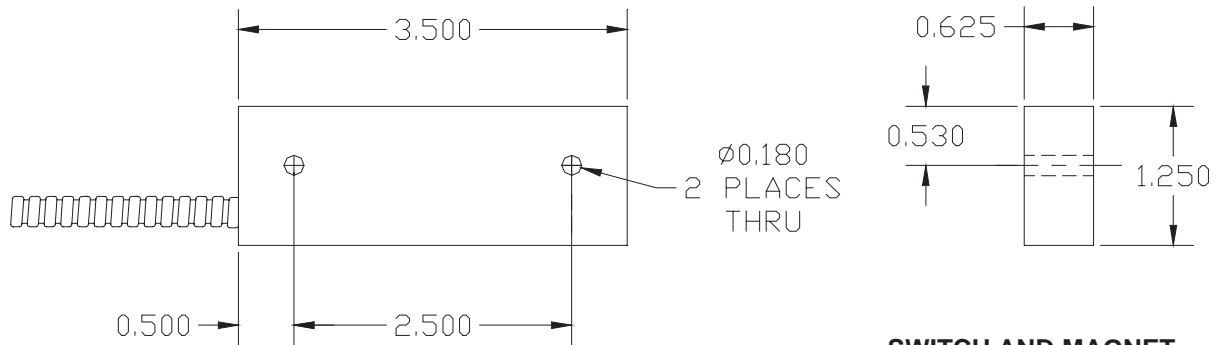

SWITCH AND MAGNET

Part Number	Loop Type	Electrical Configuration	Gap	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
1000-65	Closed	N/O	3"	.100	10	100	.500
1000-63	Open	N/C	3"	.100	3	30	.200
1000-64	Open/Closed	SPDT	3"	.100	3	30	.200