

Atlas Prox Series

Access Control Panels with built-in Web Application - No software required



Atlas400

*Also available in 1 or 2 Door options



Atlas400-BUN


*Also available in 1 or 2 Door options



Atlas400-4 Door KIT

*Also available in 1 or 2 Door options

Readers & Accessories



KR500E



KR500H



KR702E



KR500-OSDP



KR-500 BT



Prox Card



Prox-Keyfob

State-of-the-art 1, 2 and 4 door access control panels with built-in Web Application eliminate the need for management software.



Advanced Access Control Features

No software required. Built-in Web Application provides advanced access control features including User Enrollment & Management, Door Control & Monitoring, Lockdown, Reporting, Maps, Anti-Passback, First-Card Opening, Multi-Card Opening, Card Design and Duress PINs.



Door Control and More

User-programmable auxiliary relays can be used to control lights, alarms, annunciators, intrusion detection panels, additional locking devices, or any other external electrical device which can be controlled by a switch.



Capacity

1 Primary panel can support up to 20 Secondary panels. Maximum 84 doors can be supported when using all 21 panels. Each Atlas Prox Series panel can store up to 5,000 users and 10,000 transactions plus unlimited archive downloads.



Choice of Readers

Atlas Series supports ZKTeco KR series & any 3rd-party readers which communicate with Wiegand or OSDP communication protocols.



Communication

Atlas Series panels communicate securely over wired & wireless TCP/IP networks using SSL/TLS. Supported browsers include Google Chrome, Mozilla Firefox and Microsoft Edge.



Mobile App

Numerous convenient features include: remotely unlocking doors, universal lockdown & recovery, access to events & alarms, adding/modifying users, and much more.



Power


Atlas Series uses a 12V DC 3A power supply and also supports Power over Ethernet (PoE).



Lowest Total Cost of Ownership

Atlas Series panels come in several models to suit different project needs and reduce the cost of unused capacity. Easy-to-use embedded Web Application gets you up and running quickly. Firmware is field-upgradeable, allowing your system to stay current with the latest features and security enhancements.

Typical Installation

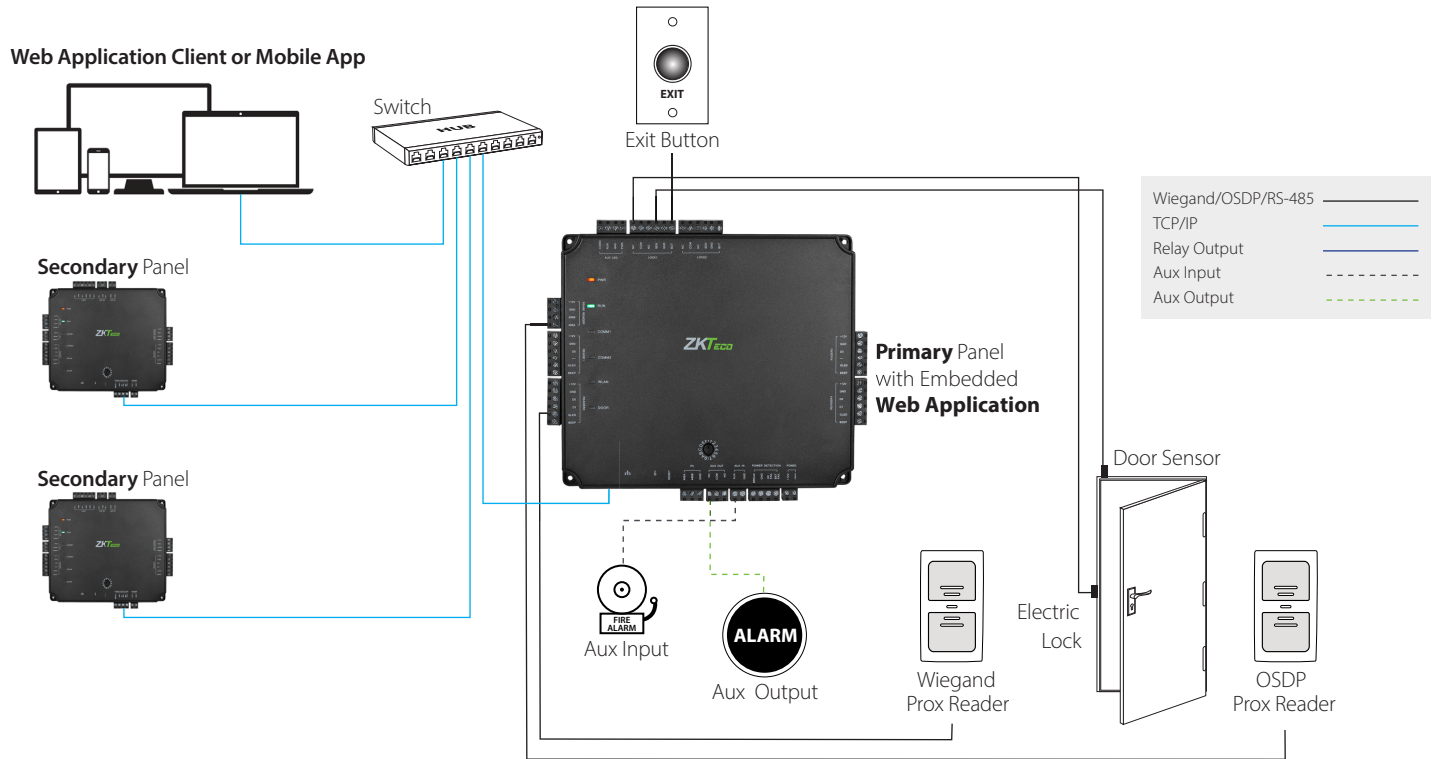

| | | | |
|-----------------------------|---|---|---|
| Number of Doors Controlled | One Door | Two Doors | Four Doors |
| Number of Readers Supported | 2 (Wiegand or OSDP Readers) | 4 (Wiegand or OSDP Readers) | & (Wiegand or OSDP Readers) |
| Types of Readers Supported | ZKTeco KR Series readers and 3rd party 125kHz & 13.56MHz Wiegand, OSDP and RS-485 readers | ZKTeco KR Series readers and 3rd party 125kHz & 13.56MHz Wiegand, OSDP and RS-485 readers | ZKTeco KR Series readers and 3rd party 125kHz & 13.56MHz Wiegand, OSDP and RS-485 readers |
| Number of Inputs | 3 (1 Exit Button, 1 Door Sensor, 1 Aux) | 5 (2 Exit Buttons, 2 Door Sensors, 1 Aux) | 9 (4 Exit Buttons, 4 Door Sensors, 1 Aux) |
| Number of Outputs | 2 (1 Form C relay for lock and 1 Form C relay for Aux output) | 3 (2 Form C relays for locks and 1 Form C relay for Aux output) | 5 (4 Form C relays for locks and 1 Form C relay for Aux output) |
| User Capacity | 5,000 | 5,000 | 5,000 |
| Events Database Capacity | 10,000 transactions plus unlimited archive downloads | 10,000 transactions plus unlimited archive downloads | 10,000 transactions plus unlimited archive downloads |
| Weight | 9 lbs (3.8 kg) | 10 lbs (4 kg) | 10 lbs (4 kg) |
| Communication | TCP/IP, Wi-Fi, Wiegand, OSDP | TCP/IP, Wi-Fi, Wiegand, OSDP | TCP/IP, Wi-Fi, Wiegand, OSDP |
| Browsers Supported | Chrome, Firefox, Edge | Chrome, Firefox, Edge | Chrome, Firefox, Edge |
| Enclosure | Powder Coated Aluminum | Powder Coated Aluminum | Powder Coated Aluminum |
| Mounting | Wall Mount | Wall Mount | Wall Mount |
| Recommended Power Supply | 12V DC, 3A (PoE) | 12V DC, 3A (PoE) | 12V DC, 3A (PoE) |
| Dimensions (Bundle Only) | 14in. X 2.5in. X 12in. 380mm(L) X 80mm(W) X 280mm(H) | 14in. X 2.5in. X 12in. 380mm(L) X 80mm(W) X 280mm(H) | 14in. X 2.5in. X 12in. 380mm(L) X 80mm(W) X 280mm(H) |
| Dimensions (Board Only) | 6.3 in. X 5.51 in. (160 mm X 140 mm) | 7.75in. X 6.73in. (197mm X 171mm) | 7.75in X 6.73in. (197mm X 171mm) |