

**Features**

- Local Operator Console
- Control the system from remote areas
- Programmable LOC priorities through Potter Fire Programmer
- Auxiliary input to interface with external audio sources. The input accepts a 600 ohm, 1VRMS and line level audio sources.
- Equipped with microphone
- Space to mount LOC-PSN1000 10A power supply and P-Link repeater
- Space to mount SCA-5070INT integrated amplifier for a self contained local operator console with 50W of single channel amplification and 4 Class B or 4 Class A speaker outputs




**Description**

The LOC-1000 local operator console is used to control system operations and ECS from remote areas to navigate the building occupancy safely and effectively to the nearest exits. The Potter Panel Programmer utilizes a priority structure to allow the IPA-4000V or local operator consoles with the highest priority control of the system. Operations such as all call, individual zone paging and ECS activation can be made directly at the LOC-1000. The panel is equipped with a supervised auxiliary input to interface with low-level audio sources and background music compatibility. A maximum of 30 LOC-1000's can be linked with the IPA-4000V.

**Technical Specifications**

Dimensions (WxHxD)	21 3/8" x 29 1/8" x 4 7/8"
Standby Current	77 mA
Alarm Current	107 mA
Temperature and Humidity Range	32° to 120° (0°C to 49°C) with a maximum humidity of 93% non-condensing.
Maximum LOC-1000	30

**Installation**

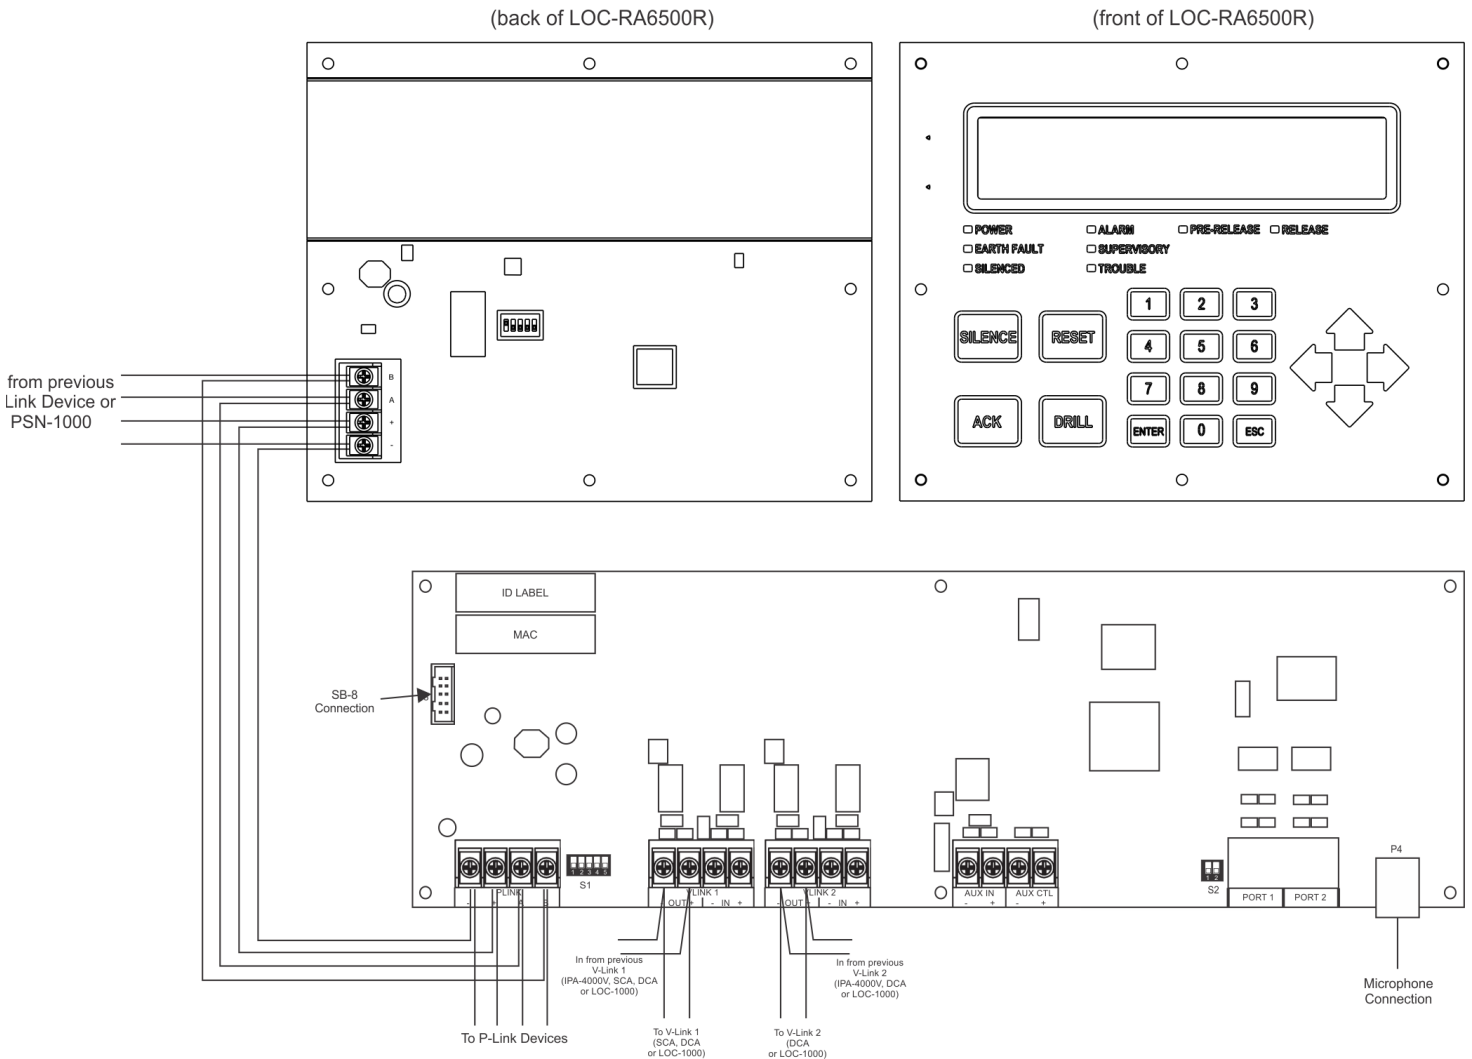

**Ordering Information**

Model	Description	Stock No.
LOC-1000	LOC-1000 LOCAL OPERATOR CONSOLE	3520661
LOC-PSN1000	LOC-PSN1000 INTLGNT POWER SUPPLY FOR LOC-1000	3520671