

Entry Alert System

E-931CS22RRCQ


Range: 22ft (7m)

Features:

- For monitoring an entrance or using an entrance indicator.
- Photoelectric beam sensor.
- Makes “ding-dong” or siren sound if beam is interrupted.
- Speaker volume can be adjusted to turned off.
- When in siren mode, sounding time is adjustable from 3 to 30 seconds.
- 9VDC adapter included.
- All components plug into each other. No hard wiring required. 32ft cable from speaker to sensor.
- Includes the following:
 - Retro-reflective photoelectric sensor.
 - Reflector.
 - Speaker/electronic chime.
 - 9VDC 200mA power adapter. 6ft cable.



Wiring:

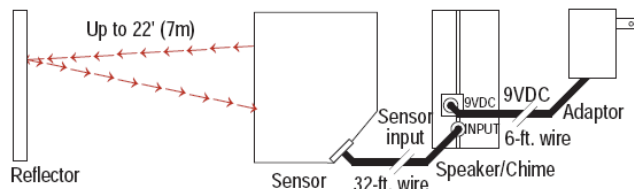

Accessories:

E-931ACC-CQ

- Automatically tracks how often the E-931CS22RRCQ is triggered.
- Push buttons to manually add to or subtract from counter or to reset to zero.
- Plugs into speaker – no wiring needed.
- 32' extension cable and mounting bracket included.



E-931ACC-SQ

- Extra speaker/electronic chime.
- Plugs into primary speaker/electronic chime.
- 32' extension cord and mounting bracket included.



Note: To extend the range, use the additional speaker (E-931ACC-SQ). Use any standard stereo cord with 1/8" stereo plug. If the range exceeds 33ft, a 9VDC adapter (sold separately) is required.

Specifications:

Type	NIR Retro-Reflective Entry Alert System	
Sensing Range	22' (7m)	
Supply Voltage	9VDC adapter included	
Total Current Draw	100mA max	
Standby Current	25mA	
Light Source	IR LED	
Ambient Temperature	-4°~122° F (-20°~50° C)	
Speaker Volume	Adjustable from 0~max	
Alarm Time Range	Adjustable 3~30 s for alarm	
External Chime Output:	NPN O/P for external device (eg., counter)	
Speaker Output	Chime/Off/Alarm (select by switch)	
Mounting Brackets	3 included	
Dimensions	Sensor	2 ¹³ / ₁₆ "x2 ³ / ₈ "x1 ³ / ₁₆ " (71x60x30 mm)
	Speaker	2 ¹³ / ₁₆ "x2 ⁷ / ₁₆ "x1 ³ / ₈ " (71x62x35 mm)
	Reflector	2 ³ / ₈ "x2"x5 ¹ / ₁₆ " (60x50x8 mm)

SECO-LARM

16842 Millikan Ave • Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7328

sales@seco-larm.com • www.seco-larm.com



Copyright 2012 © SECO-LARM U.S.A., Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM CRIMEBUSTER® CBA SLI

pi-E-931CS22RRCQ.docx