




The recessed “shortie” switch set is designed for applications where a 3/8” press to fit set is needed, but space limitations will not allow for a full length set to be installed. The installer is able to protect openings with this reed switch that otherwise would have to be secured with more visible surface mount configurations. Available in regular and extra wide gaps, this series provides an easy answer to the difficult, high dollar window problems every installer encounters.

Features:

- Ideal for thin framed doors and windows
- Recessed magnetic contact, press to fit
- Plated contacts resist sticking or freezing
- Screw Terminals
- 1/2” + standard gap and 1” + extra wide gap available
- 1/4” x 1/2” MM-9RS or 1/4” x 1” M-5 rare earth magnets in a case
- Hermetically sealed
- UL and ULC listed
- Made in the U.S.A.
- Colors: White (W), Almond (AL), Brown (B), Black (BL), or Gray (G)

Miniature 3/8” Recessed Switch Set -10 Pack

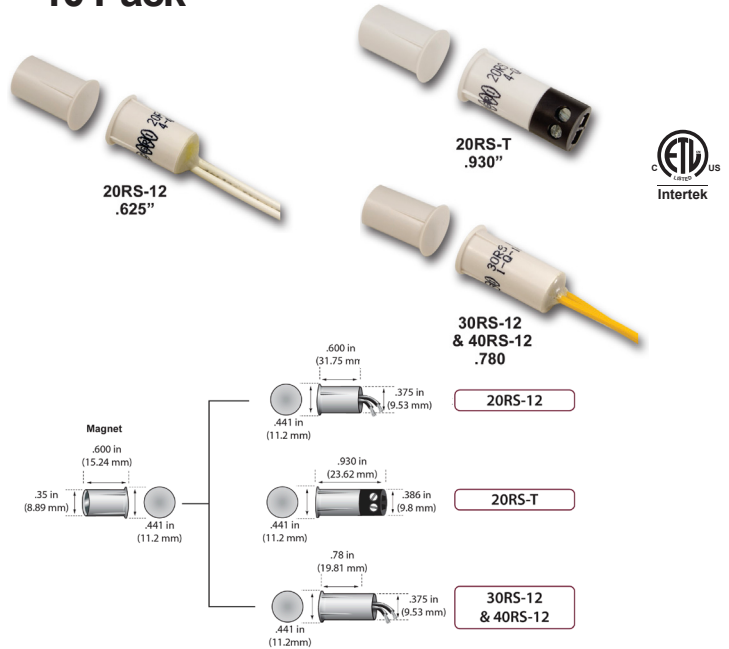

Standard Gap 1/2”+	Part Numbers		
	Closed Loop	Open Loop	SPDT
	20RS-12 20RS-T	30RS-12	40RS-12
Extra Wide Gap 1”+	20RS-12 XWG 20RS-TXWG	30RS-12XWG	40RS-12XWG

Part Number	Loop Type	Electrical Configuration	Reed Form	Max. Initial Contact Resistance (Ω)	Max. Contact Rating (W)	Max. Switching Voltage (VDC)	Max. Switching Current (A)
20RS-12	Closed	N/O	A	.150	10	200	.500
20RS-12XWG	Closed	N/O	A	.150	10	200	.500
20RS-T	Closed	N/O	A	.150	10	200	.500
20RS-TXWG	Closed	N/O	A	.150	10	200	.500
30RS-12	Open	N/C	B	.140	5	175	.250
30RS-12XWG	Open	N/C	B	.140	5	175	.250
40RS-12	Open/Closed	SPDT	C	.140	5	175	.250
40RS-12XWG	Open/Closed	SPDT	C	.140	5	175	.250

©2023 CRN Solutions Inc. dba. Primus Cable
All Rights Reserved.

Although Primus Cable makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Primus Cable provides the information and specifications herein on an “AS IS” basis, with no representations or warranties, whether express, statutory or implied. In no event will Primus Cable be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Primus Cable has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Primus Cable products are subject to Primus Cable’s standard terms and conditions of sale.

Primus Cable believes this product to be in compliance with EU RoHS (Directive 2002/EC, 27 Jan. 2003). Material manufactured prior to the compliance date may be in stock at Primus Cable facilities and in our Distributor’s inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Primus Cable’s knowledge, information, and belief at the date any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification and regulations based on their individual usage of the product.

Primus Cable declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC

PrimusCable.com - (951) 824-1571

