

# AL624ET

## Linear Power Supply/Charger Kit

Altronix AL624ET linear power supply/charger kit converts a 115VAC 60Hz input into 12VDC output. This general purpose power supply has a wide range of applications for access control, security, and CCTV system accessories that require additional power.



AL624ET

### Specifications

#### Input

Voltage 115VAC, 60Hz, 1.2A

#### Output

Voltage 12VDC

Current 1.2A supply current

Other Short circuit and thermal overload protection  
Filtered and regulated

#### Battery Charging

Type Sealed lead acid or gel type

Failover Upon AC loss, instantaneous

Batteries are sold separately

#### Indicators (LED)

Input Input voltage is present

DC Output Powered

### Physical and Environmental

#### Dimensions (H x W x D)

Enclosure:

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

Shipping:

13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

Enclosure accommodates two (2) 12VDC/4AH batteries  
or one (1) 12VDC/7AH battery

#### Weight (approx.)

Product: 4.6 lb. (2.1 kg)

Shipping: 5.15 lb. (2.3 kg)

#### Temperature

Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.): 7 BTU/Hr.

Mounting hardware is included

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


# AL624ET

Linear Power Supply/Charger Kit

## Dimensions and Drawing

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

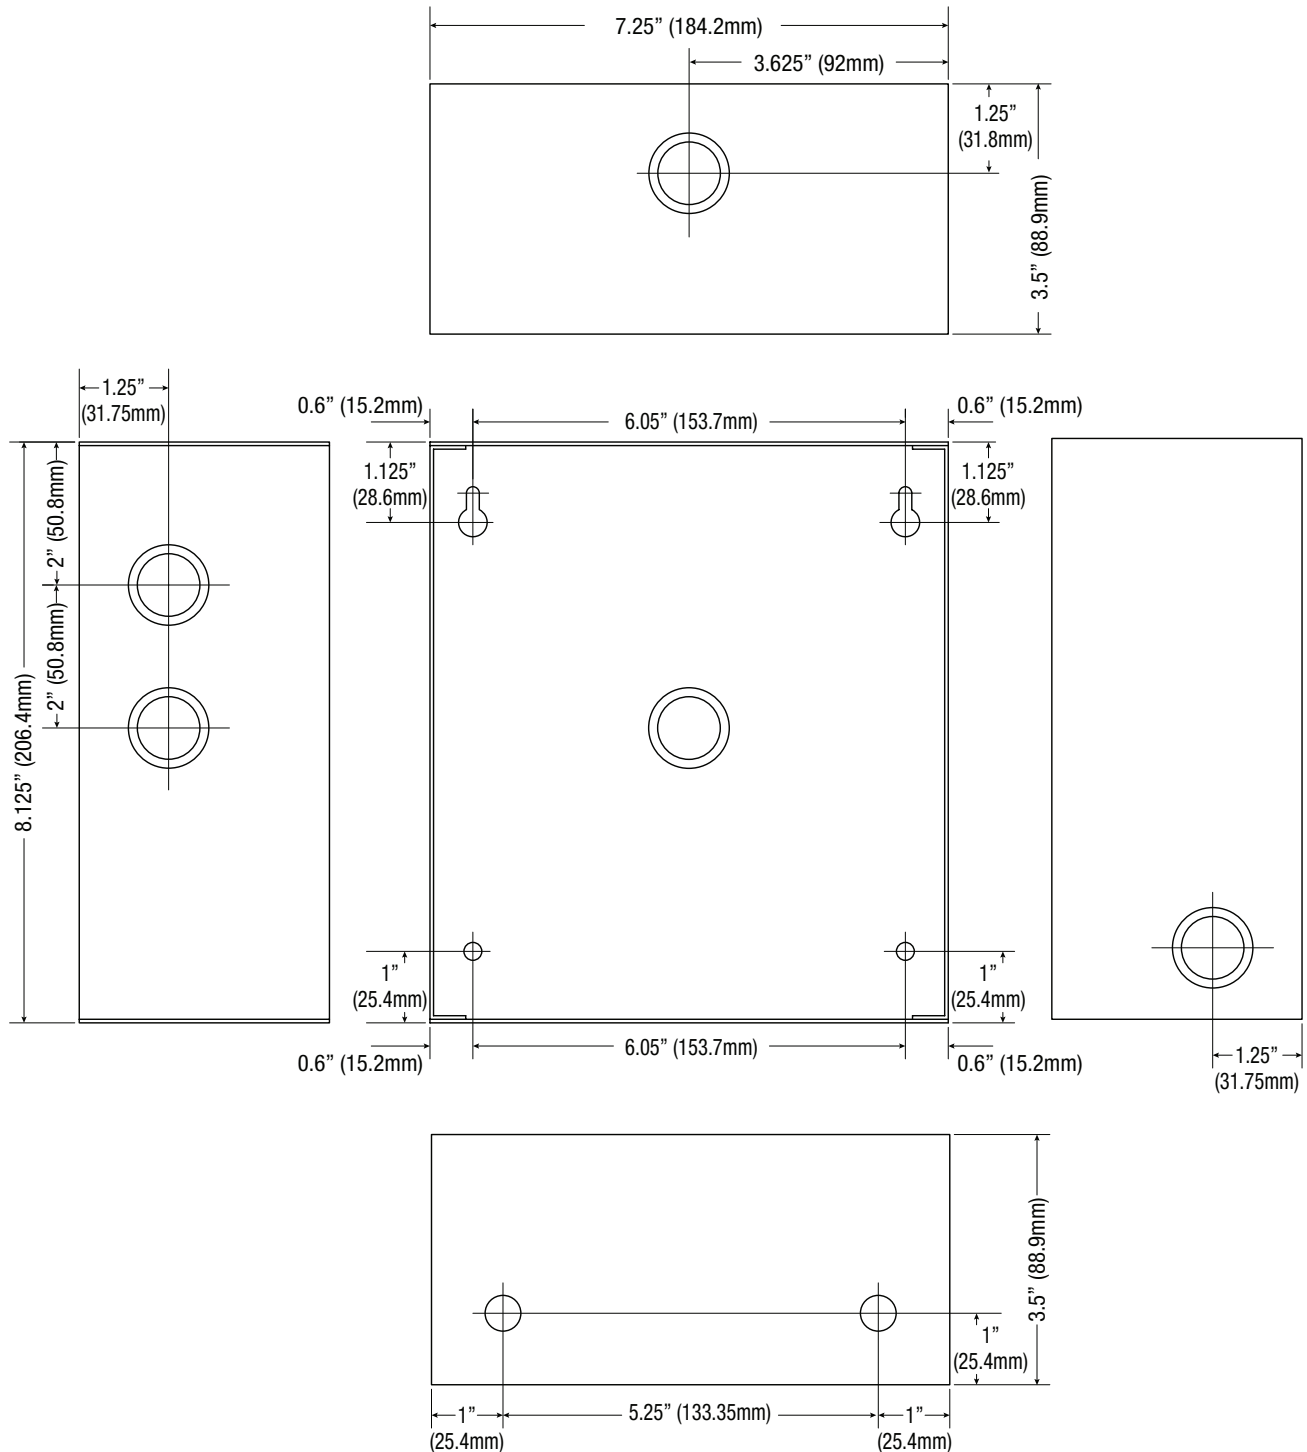

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com