Brochure

CALRAD ®
Electronics

For technical assistance
call: **323-465-2131**

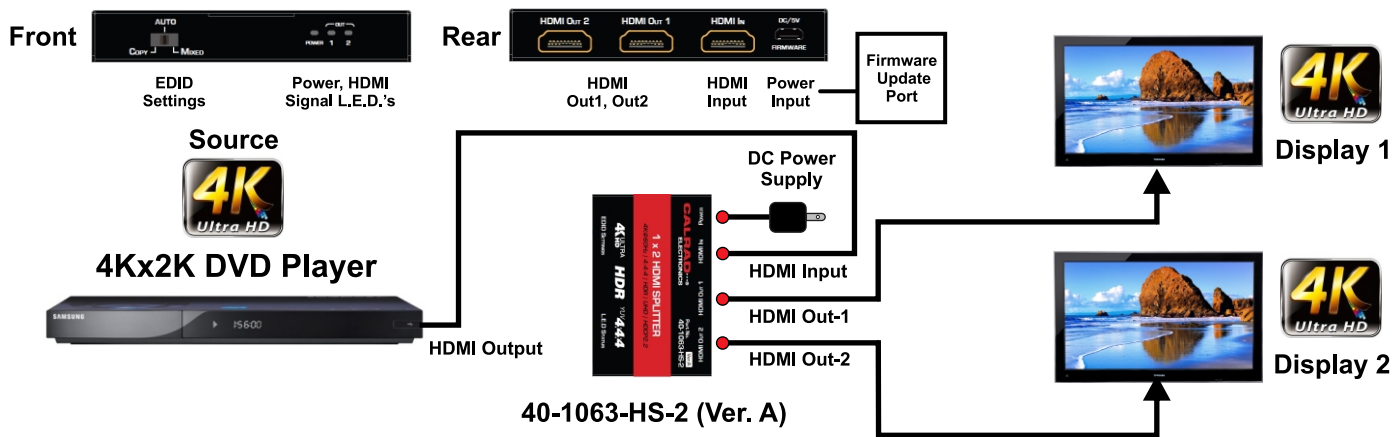5Vdc Power Supply
With USB Interface cable

40-1063-HS-2 (Ver A) 2 Way 4Kx2K@60, 4:4:4 HDMI Splitter with HDR

Description

The Calrad 40-1063-HS-2 (HDR), 2 way HDMI splitter with HDR Accepts Ultra HD 4Kx2K 30\60Hz HDMI video sources and splits the signal to two separate outputs simultaneously without loss of quality or resolution. Perfect for for use with 4K Ultra HD displays or other types of 4K signal distribution. Works with all compatible 4Kx2K HDMI baluns and audio-video hardware. Two HDMI L.E.D. signal indicators illuminate when HDMI signal connectivity is working on each output 1-2. A power L.E.D. indicator indicates the unit has 5Vdc power. EDID management, a convenient front panel 3 position slide switch for setting EDID preferences to help minimize connectivity delays and signal issues. Power is provided by a 5Vdc USB plugin module with a USB type 'A' jack power supply, includes a 2 ft. USB Male Type 'A' to Male Micro USB interface cable.

Typical Hookup

Front

EDID Settings

Power, HDMI Signal L.E.D.'s

Rear

HDMI Out1, Out2

HDMI Input

Power Input

Firmware Update Port

Display 1

Source

4Kx2K DVD Player

HDMI Output

DC Power Supply

HDMI Input

HDMI Out-1

HDMI Out-2

Display 2

40-1063-HS-2 (Ver. A)

Specifications — All product Information and specifications subject to change without notification.

- **Connectors: Input:** 1 x HDMI Jack, **Outputs:** 2 x HDMI Jacks, DC Power 1x Micro USB Port
- **HDTV Resolutions:** 4k x 2k (3840 x 2160@60Hz, YUV 4:4:4), 1080p, 1080i, 720p, 480p
- **HDCP Support:** V1.4 - V2.2
- **Bandwidth:** 18Gb, Up to 600Mhz / 3.4Gbps per Channel
- **Supports:** HDR, 3D, HDCP 1.4 to 2.2, 12bit per channel (36bit all channel) deep color
- **Audio Support:** LPCM 7.1, DTS Digital, Dolby Digital, DTS-HD and Dolby True HD
- **EDID Modes:** Slide switch to select 3 EDID Modes: Mixed EDID, Copy EDID, Auto EDID (Default 4Kx2K output)
- **Front Panel L.E.D Indicators:** 1 x Power, 1 x HDMI Out1, 1 x HDMI Out2
- **Power Supply:** USB Type 'A' Jack, DC 5V\1A
- **USB Power Cable:** 1 x 2 ft. USB Male Type 'A' to Male Micro USB
- **Firmware Updates:** Please contact our Technical Support department for further details
- **Operating Temperature:** -5 to +35 degrees C
- **Operating Humidity:** 5 to 90% RH (No Condensation)
- **Case:** Metal, **Color:** Black
- **Dimensions:** 5.9" L x 2.53" W x 0.67" H
- **Weight:** 0.26 lbs.

40-1063-HS-2VERA-05242018-WB

www.calrad.com