



## DESCRIPTION

The JO-1FD is a video expansion station for use with the JO-1MD or JO-1MDW master stations. It is used when a second master station is required. The station is installed between the JO door station and the master station, using a 2-conductor to the door and a 6-conductor to the master.

During a call from the door station, video will be displayed on the 7" TFT screen, accompanied by a short chime. Answering the call is done by a short push and release of the talk button for hands-free communication, or a push and hold for Push-to-Talk communication. Door release is also available by pushing the key button at any time.

Outside of communications, the monitor button can be used to discretely view video from the door station. Volume levels for the call tone and from the door can be adjusted independently using a single button, based on the current status of the station.


## FEATURES

- 7" Screen
- Slim design
- Hands-free or Push-to-Talk communication
- Electrostatic touch buttons
- 2-wire connection to door

# JO-1FD

## JO Expansion Station

### FEATURE CALL-OUT:

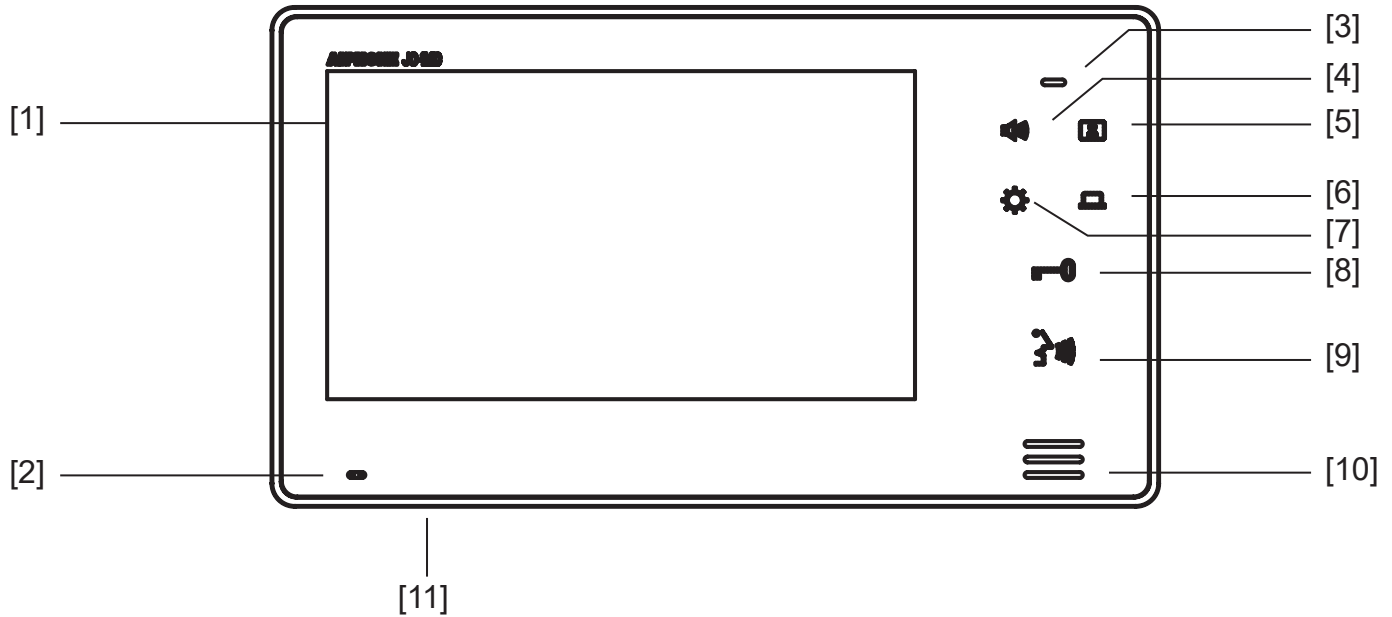

### FEATURE CALL-OUT DEFINITIONS

- [1] LCD screen
- [2] Microphone
- [3] Status LED
- [4] Volume control button
- [5] Monitor button
- [6] Option button
- [7] Screen brightness control
- [8] Door release button
- [9] Talk/Off button
- [10] Speaker
- [11] Reset button

### SPECIFICATIONS

- Power source:** 18V DC (PS-1820UL)
- Current consumption:** Max. 420mA
- Dry contacts:** N/O 24V AC/DC, 500mA
- Communication**
  - Auto-voice actuation
  - Push-to-talk, release to listen
- Monitor:** 7" TFT LCD
- Mounting:** Wall mount (3-gang box)
- Material:** Flame resistant ABS resin
- Color:** White
- Temperature:** 32°F~104°F (0~40°C)
- Dimensions:** 5-1/8" H x 9-1/16" W x 13/16" D
- Weight:** Approx. 1.06lbs (480g)