

MODEL 600WP

600 POUND WEATHER-PROOF MAGNETIC LOCK



SPECIFICATIONS

- IDEAL FOR SLIDING AND SWINGING GATES
- 600 POUND MINIMUM HOLDING FORCE
- MAGNET SIZE 9-7/8" L x 1-11/16" H x 1" W
- ARMATURE SIZE 7-1/4" L x 1-7/16" W x 5/8" D
- 12 OR 24 VOLT DC OPERATION
- CURRENT DRAW 440 MA @ 12 VDC, 260 MA @ 24 VDC
- 12" COLOR CODED LEADS IN ARMORED CABLE WITH METAL END CAP
- COMPLETELY SEALED IN STAINLESS STEEL CASE
- ALL NON-STAINLESS STEEL PARTS ARE PLATED TO RESIST CORROSION
- GATE MOUNTING BRACKETS ARE AVAILABLE
- LIFETIME WARRANTY



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

MODEL 600WP SPECIFICATIONS


ELECTRICAL SPECIFICATIONS

SUPPLY VOLTAGE: 12 OR 24 VOLTS DC
CURRENT DRAW: 440 MA. @ 12 VDC, 260 MA. @ 24 VDC

MECHANICAL SPECIFICATIONS

HOLDING FORCE: 600 POUNDS MINIMUM
HOUSING: STAINLESS STEEL


WIRING DIAGRAM

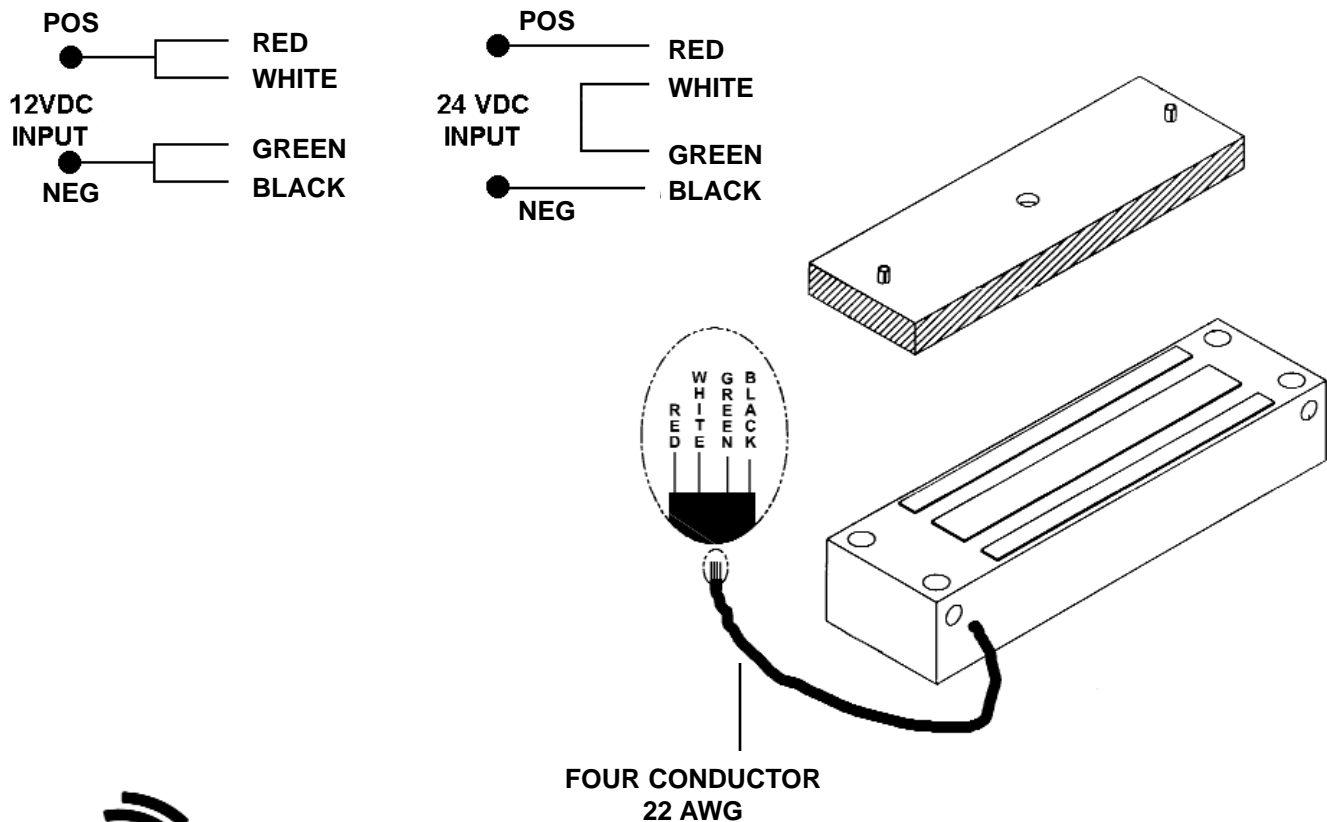


ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729
1 800 645-5538

MODEL 600WP INSTALLATION TEMPLATE

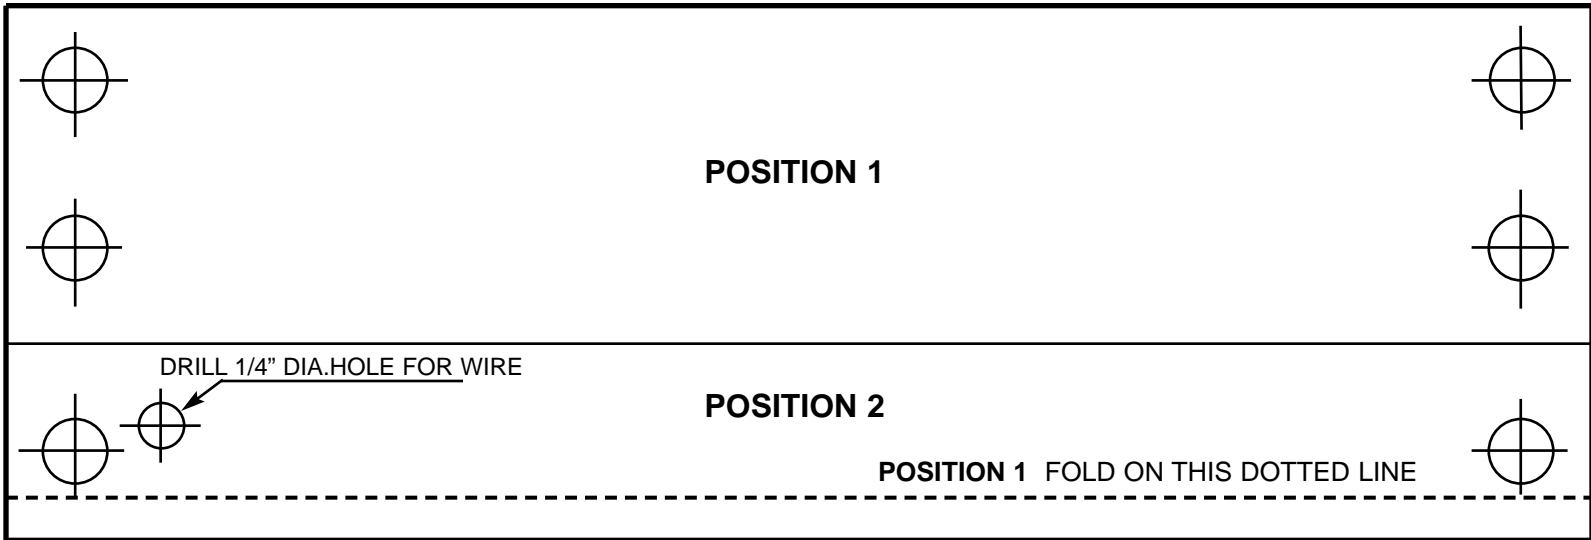

POSITION 2 FOLD ON THIS DOTTED LINE

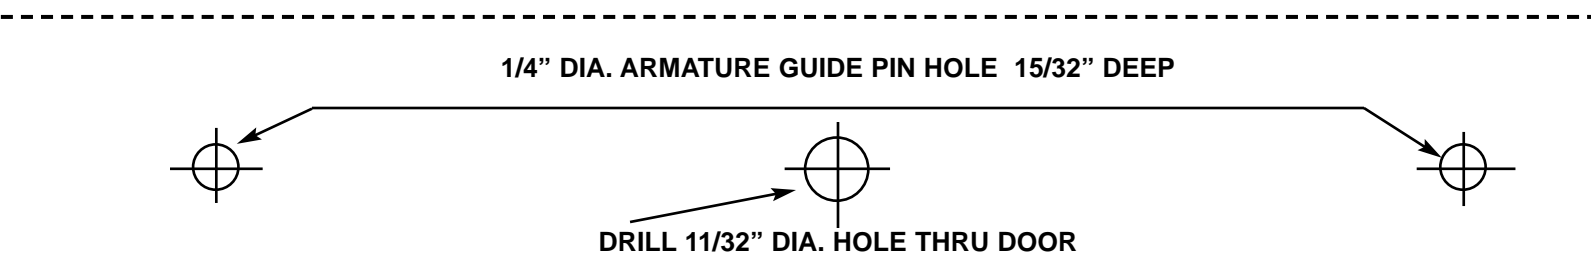

ALARM CONTROLS CORPORATION
DEER PARK, NEW YORK 11729


GATE LOCK INSTALLATION EXAMPLES

USE AM3370 BRACKET FOR MODEL 600WP

USE AM6370 BRACKET FOR MODEL 1200WP

CONSULT FACTORY FOR CUSTOM BRACKETS


TYPICAL SLIDING GATE
INSTALLATION

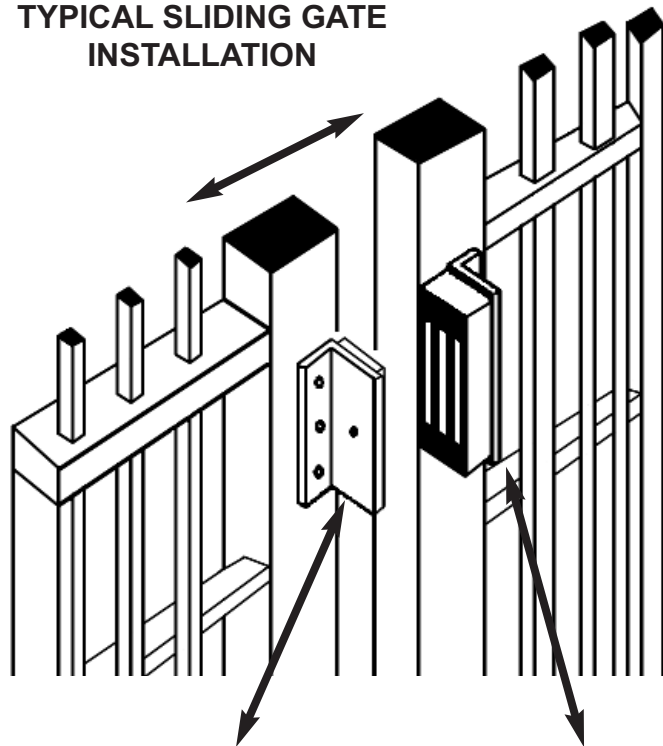

ANGLE BRACKET
ATTACHES
ARMATURE TO
MOVING SECTION
OF GATE

ANGLE BRACKET
ATTACHES
MAGNET TO
STATIONARY
SECTION
OF GATE

TYPICAL SWINGING GATE
INSTALLATION

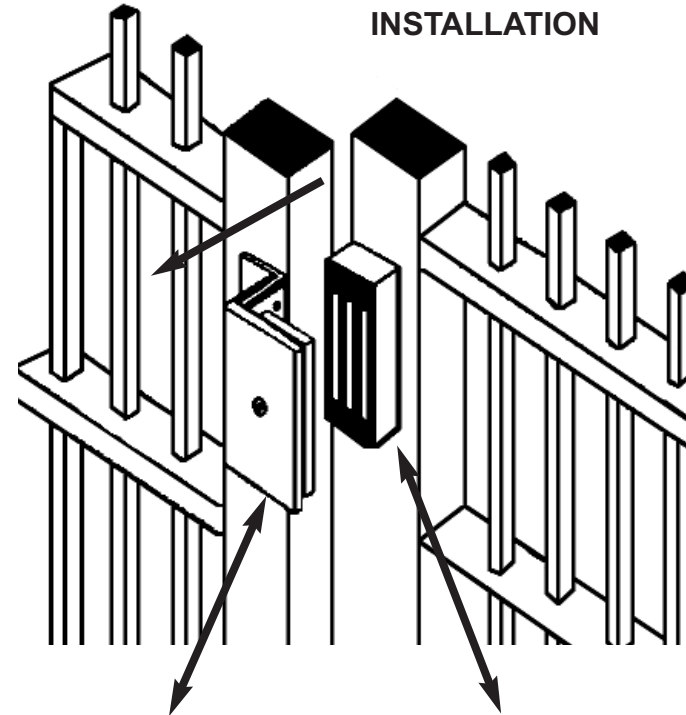

ADJUSTABLE
Z BRACKET
ATTACHES
ARMATURE TO
MOVING SECTION
OF GATE

MAGNET
MOUNTS ON
STATIONARY
SECTION
OF GATE



ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE P.O. BOX 280

DEER PARK, NY 11729

1 800 645-5538