

Screw-Terminal Surface-Mount Contacts

Please visit the SECO-LARM website www.seco-larm.com for complete installation instructions.

Please read the manual carefully before beginning installation.

SM-200Q/W

3/4" (19mm) Gap, Closed Loop, White

SM-200Q/BR

3/4" (19mm) Gap, Closed Loop, Brown

SM-300Q/W

1/2" (13mm) Gap, Open Loop, White

SM-300Q/BR

1/2" (13mm) Gap, Open Loop, Brown

Features:


- Surface-mount magnetic contacts
- Screw mount using side tabs
- Terminal cover provided (required for all applications)
- ABS plastic case has lip to prevent wires from accidentally touching metal mountings and slotted mounting holes for easier gap adjustment
- Contact reed switch is SPST, deactivated rhodium on gold underplating for a longer expected life
- For closed loop circuits (SM-200Q only)
- For open loop circuits (SM-300Q only)
- 3/4" (19mm) Gap (SM-200Q only)
- 1/2" (13mm) Gap (SM-300Q only)
- Mounting screws included
- Lifetime limited warranty

Specifications:


Model number	SM-200Q/W	SM-300Q/W
	SM-200Q/BR	SM-300Q/BR
Loop type	Closed loop	Open Loop
Electrical configuration	N.O. (SPST)	N.C. (SPST)
Operation gap	3/4" (19mm)	1/2" (13mm)
Connectors	Screw-terminals	
Mounting tabs	Yes	
Material	Case	High-impact ABS plastic
	Contacts	Deactivated rhodium on gold underplating
Contact rating	1.0A@10VDC (max.)	
	10W (max.)	
Operating temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	2 1/2" x 9/16" x 1/2" (63x14x13 mm)	
Magnet dimensions	2 1/2" x 1/2" x 1/2" (63x13x13 mm)	
Magnet type	Ferrite	



SM-200Q/BR shown



Dimensions:

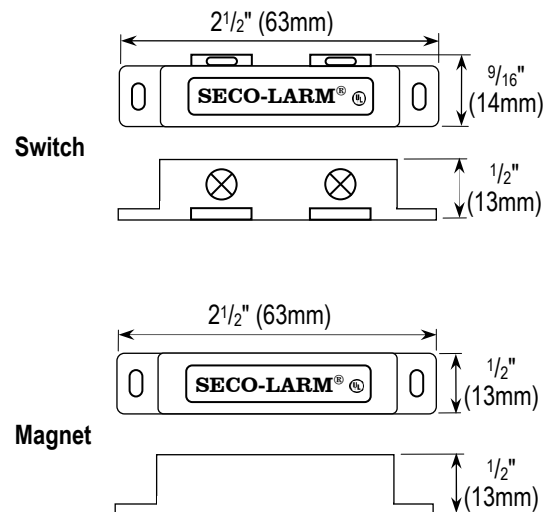

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Tornillo-Terminal de Montaje en Superficie Contactos Magnéticos

Por favor visite el sitio web de SECO-LARM www.seco-larm.com para obtener instrucciones de instalación completas.

Por favor lea el manual antes de usar el equipo.

SM-200Q/W

3/4" (19mm) Brecha, Lazo Cerrado, Blanco

SM-200Q/BR

3/4" (19mm) Brecha, Lazo Cerrado, Café

SM-300Q/W

1/2" (13mm) Brecha, Lazo Abierto, Blanco

SM-300Q/BR

1/2" (13mm) Brecha, Lazo Abierto, Café

Características:

- Contactos magnéticos de montaje superficial
- Montaje de tornillo utilizando lengüetas laterales
- Cubierta de terminal provista (requerida para todas las aplicaciones)
- La caja de plástico ABS tiene un borde para evitar que los cables toquen accidentalmente los montajes de metal y los orificios de montaje ranurados para facilitar el ajuste del espacio
- El interruptor de lengüeta de contacto es SPST, rodio desactivado en la capa inferior de oro para una vida útil más larga
- Brecha de 3/4" (19mm) (SM-200Q solamente)
- Brecha de 1/2" (13mm) (SM-300Q solamente)
- Para circuitos cerrados (SM-200Q solamente)
- Para circuitos abiertos (SM-300Q solamente)
- Tornillos de montaje incluidos
- Garantía limitada de por vida

Especificaciones:

Número de modelo	SM-200Q/W	SM-300Q/W
	SM-200Q/BR	SM-300Q/BR
Tipo de circuito	Lazo cerrado	Lazo abierto
Configuración eléctrica	N.A. (SPST)	N.C. (SPST)
Brecha de operación	3/4" (19mm)	1/2" (13mm)
Terminales	Tipo tornillo	
Lengüetas de montaje	Sí	
Material	Caja	Plástico ABS de alto impacto
	Contactos	Rodio desactivado en chapado de oro
Puntuación de contactos	1.0A@10V C.C. (max.)	
	10W (max.)	
Temperatura	-15°~160° F (-25°~70° C)	
Ciclos de conmutación	50 Milliones (0.1mA@5V C.C.)	
Dimensiones del interruptor	2 1/2"x9/16"x1/2" (63x14x13 mm)	
Dimensiones del imán	2 1/2"x1/2"x1/2" (63x13x13 mm)	
Tipo de imán	Ferrita	



SM-200Q/BR mostrado

SECURITY



Tipo: S
49J5




Contactos Chapados en Oro

Imán de Ferrita

Tornillo Terminal

Plástico ABS

Dimensiones:

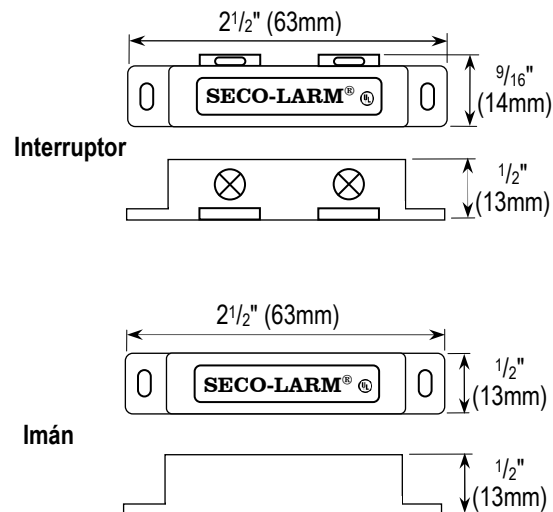

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com