


Specifications:


- 12VDC or 24VDC selectable operation.
- Turn SW1 OFF for 24VDC operation.
Turn SW1 ON for 12VDC operation.
- Current draws: 75mA.
- 5A/220VAC or 28VDC DPDT contacts.
- Snap track mountable (order part # ST1).

Board dimensions (approximate): 2.75"L x 2"W x 1"H


Dry Contacts




SW1 DIP Switch




Polarity Reversal

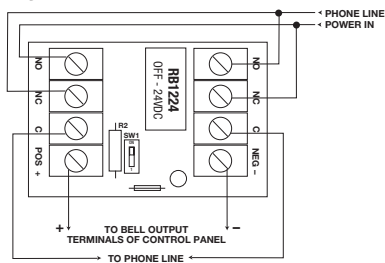

Latching Dry Contacts

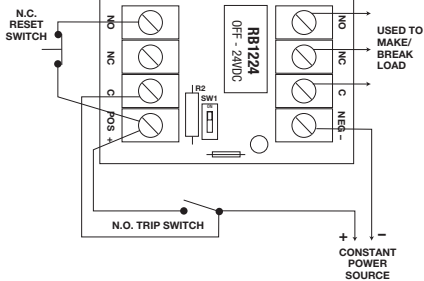

Line Seizure

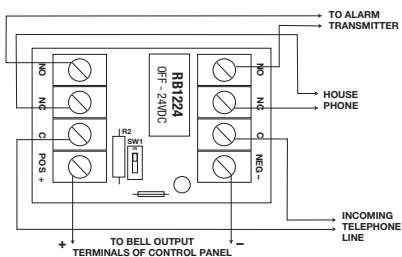

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty

IIRB1224 - Rev. 121205

F21U