




RB524 Relay Module


Specifications:

- 24VDC operation.
- Current draws: 40mA.
- 5A/220VAC or 28VDC DPDT contacts.
- Snap track mountable (order part # ST1).


Dimensions (L x W x H): 2.75" x 2" x 1" (69.9mm x 50.8mm x 25.4mm)




Dry Contacts




Polarity Reversal

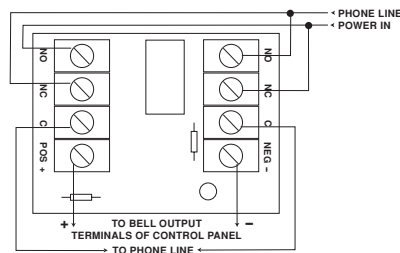

Latching Dry Contacts

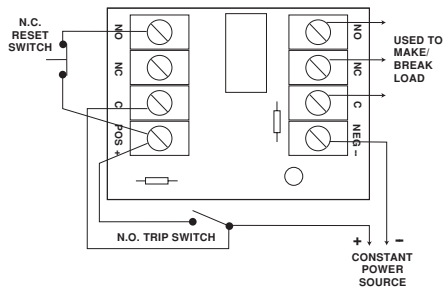

Line Seizure

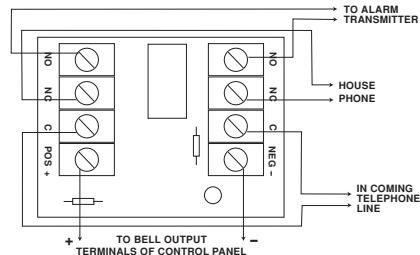

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty

IRB524 - Rev. 081004

F21U

