



RBUL

UL Listed Sensitive Relay Module

SECURITY



Specifications:



- UL Listed Burglar Alarm System SubAssembly (UL365).
- 12VDC or 24VDC selectable operation.
- Current draw 30mA.
- 1A/30VDC SPDT contacts.
- Includes snap track (ST1).

Board dimensions: 2" x 2.75" x 1" (50.1mm x 69.9mm x 25.4mm)

Installation Instructions:

1. Mount relay in desired enclosure. Secure snap track with screws.
Be sure to provide enough clearance between PC board and snap track mounting screw head to avoid short circuit.
2. Connect DC input to terminals marked [+ POS] and [- (NEG)].
3. For 24VDC operation cut jumper J1 on relay module.

Dry Contacts

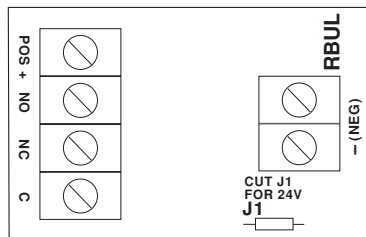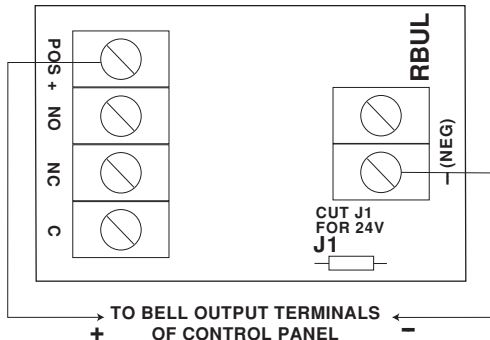

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056
website: www.altronix.com | e-mail: info@altronix.com | Lifetime Warranty
IIRBUL - Rev. 061808 F21U

