


AVC-DB21F23

2MP H.265 Wi-Fi SMART VIDEO DOORBELL

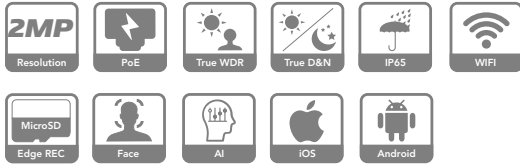

2MP H.265 Wi-Fi SMART VIDEO DOORBELL

2MP H.265 Wi-Fi SMART VIDEO DOORBELL


The AVYCON AVC-DB21F23 is a doorbell device with a 2MP H.265+ Fixed Camera. This doorbell supports access control with a card reader or app remote control, True Day and Night mode, Smart IR Illumination up to 9.8ft, WiFi connection, and also includes a microSD memory card slot of up to 256GB for standalone recording applications. The AVC-DB21F23 is ONVIF compliant and features video analytics such as Face Detection, Face Capture, and Tamper Detection.

FUNCTIONS

- Max. resolution: 2MP (1920×1080)
- Wide field of view achieving doorway security monitoring
- Access control function
- Noise suppression and echo cancellation
- Visual intercom function: two-way remote communication between the doorbell /mobile APP
- Support door opening by swiping card or mobile APP
- Support IR and white LED lights
- Support tampering alarm and door contact alarm
- 2.4G Wi-Fi
- Built-in micro SD card slot, up to 256GB
- Intelligent Analysis: video exception detection, face detection, face capture, etc.

DIMENSIONS

Unit: Inches

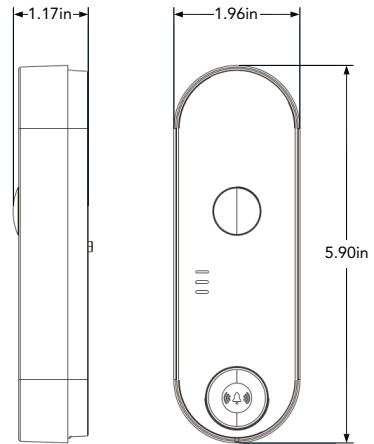

OPTIONAL ACCESSORIES



AVM-DB2-S1
Sunshade Bracket



AVM-DB2-S1WB1
Sunshade Bracket
with Wire Box



AVM-DB2-ABKT1
Angled Corner Bracket



AVM-DB2-CHM1
Doorbell Chime



AVYCON[®]

AVC-DB21F23

2MP H.265 Wi-Fi SMART VIDEO DOORBELL

SPECIFICATIONS

CAMERA	
Image Sensor	1/2.8" Progressive Scan CMOS
Image Size	1920×1080
Electronic Shutter	1/2s ~ 1/100000s
IRIS Type	Fixed IRIS
MIN. Illumination	0 lux (white LED ON)
Lens	2.3mm @F2.2; Vertical FOV:74, Horizontal FOV: 139 , Diagonal FOV: 170
Lens Mount	M8
WDR	80dB
BLC	Yes
HLC	Yes
Defog	Yes
DNR	2D/3D NR
IMAGE	
Video Compression	H.265+/H.265/ H.264+/H.264/MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	64Kbps ~ 4Mbps
Resolution	1080P(1920×1080), 720P(1280×720), D1
Main Stream	60Hz: 1920×1080/1280×720(1~30fps); 50Hz :1920×1080/1280×720(1~25fps)
Sub Stream	60Hz: 720P/D1/CIF(1~30fps); 50Hz: 720P/D1/CIF(1~25fps)
Image Setting	Saturation, hue, brightness, contrast, wide dynamic range, sharpness, NR, etc., adjustable through client or web browser
Audio Compression	G711A/U
CARD	
Card Type	Mifare card /Desfire card/FM1208 Card/Gicard
Card Reading Protocol	ISO14443A/B
Card Reading Frequency	13.56MHz
Card Reading Duration	<1s
Card Reading Distance	0~3cm
Card Number Storage	Max.3,000
INTERFACES	
Network	100M RJ45
Audio	Built-in MIC×1, built-in speaker×1
RS485	Yes
Alarm	1CH alarm input
Door Lock Output	1CH
Exit Button	1CH
Door Contact Input	1CH
Anti-Tamper Interface	1CH
Reset Button	1
Storage	1CH built-in micro SD card slot, up to 256GB
Wiegand Interface	Yes (Wiegand input or output configurable)
WiFi	Supports 2.4G WiFi function
Doorbell Button	Yes
Indicator	Yes
FUNCTION	
Remote Monitoring	Web client/CMS remote control
Online Connection	Supports simultaneous monitoring for up to 3 users Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, UPnP, HTTPS, HTTP
Interface Protocol	ONVIF
Storage	Network remote storage, micro SD card storage
Intelligent Analytics	Face detection, face capture, scene change detection, video blur detection, video cast detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login, image distortion correction
Door Opening Mode	Swiping card or APP remote control
White Light Distance	0.9-3.2ft soft light
IR Light Distance	0.9-9.8ft
Ingress Protection	IP65
FACE	
Face Detection	Pupil distance of a facial image over 20 pixel can be detected
Face Capture	Outputting the optimal face image by precise detecting, tracing, capturing, scoring and screening the moving faces
Original Image Capturing	Supports original image capturing and self-defined overlaid information (like device ID, time, etc.)
Intelligent Light Compensation	Built-in high efficient white light LEDs
OTHER	
Power	DC12V/0.5A
PoE Power Supply	Yes
Power Consumption	< 6W
Environmental Protection	RoHS 2.0 REACH WEEE, directive94/62/EC
Working Environment	-4°F ~122°F, Humidity: less than 95% (non-condensing)
Dimensions (inches)	5.90in x 1.96in x 1.17in
Weight (net)	Approx.0.31lbs
Installation	Wall mounting



Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606

email: info@avycon.com

social: @avycon_aivo

website: avycon.com