

# CICRP-500HA

## Single Gang Proximity Reader

The Continental Access Single Gang Pyramid Proximity Reader sets the electronic security benchmark for 125-kHz proximity readers, cards, and tags. Based upon proven contactless digital radio frequency identification (RFID) technology, Pyramid readers interface with a wide range of electronic access control systems by complying with the Wiegand communication protocol. They offer value-add features such as MAXSecure™ and fleaPower™, and can be ordered to support several proximity card and tag technologies. Additionally, Pyramid cards and tags are passive devices, eliminate maintenance by requiring no battery, and can be ordered to support several proximity reader technologies.




DOORS



PARKING



TURNSTILES

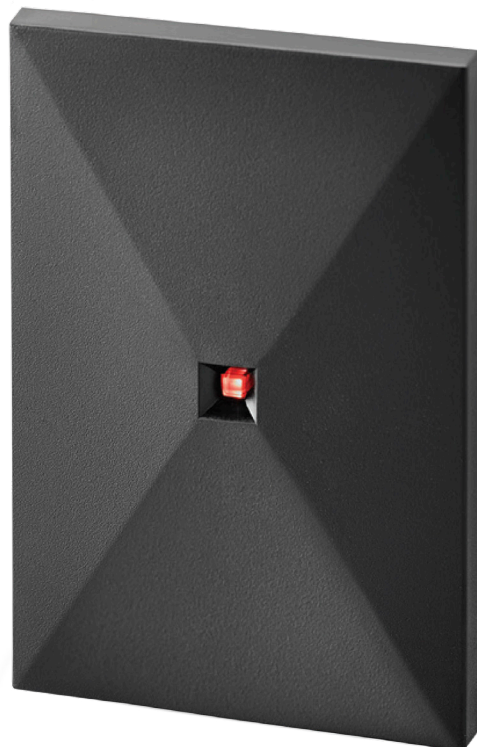

Specifications	CICRP-500HA
Technology	Proximity
Frequency	125 kHz
Mounting	Metal or plastic US single-gang wall box, as well as flat surfaces
Dimensions	3" W x 4.6" H x 0.4" D (76 mm x 117 mm x 10 mm)
OEM Label Area Dimensions	0.9" W x 0.35" H (22.86 mm x 8.89 mm), with corner radius of 0.06" (1.5 mm)
Weight	4 oz (113 g)
Certifications	FCC, ICC, CE, C-Tick, UL Standard 294
IP Code	IP67
Voltage	+5 – 16 VDC
Current Draw	30 mA typical, 75 mA peak @ 12 VDC
Read Range	Up to 8 inches (202 mm)
Cabling	24 AWG minimum, multiconductor stranded with an overall foil shield
Interface	Wiegand ABA Track II
Operating Temperature	-40° F to 149° F (-40° C to +65° C)
Color Options	Black and a white snap-on cover included standard
Audio Tone	Beeper included standard
Indoor & Outdoor Installation	Electronics sealed in weather- and tamper-resistant epoxy potting
Warranty	Limited lifetime warranty
LED	Four-state standard (red, green, amber, and off)
Technologies Supported	Pyramid + certain HID® 125-kHz Proximity protocols + certain AWID® 125-kHz Proximity



**MAXSecure™**  
Unique Security Feature



**FleaPower™**  
Energy Conservation Technology



**Pro-X™**  
Read-Range Boosting Technology



**ETL Listed**  
Independently Tested and Certified to Conform to UL Standard 294



**Warranty**  
Lifetime Warranty



**Weigand**  
Output Interface



**U.S. Single-Gang Wall-Box Mount**  
Metal or Plastic Box & Flat Surfaces



Continental Access, a division of Napco Security Technologies, Inc.

355 Bayview Ave., | Amityville, NY 11701

1.800.645.9445 | 631.842.9400 | Fax 631.842.9135 | www.cicaccess.com

Pyramid Series Proximity®, Delta®, Ranger®, and CONEKT® are the registered U.S. trademarks of Farpointe Data, Inc. AWID is a registered trademark of Applied Wireless Identifications Group. HID, the HID logo, ProxCard II, ISOProx, and ProxKey are registered trademarks of HID Global Corporation, an ASSA ABLLOY company. All other trademarks are the property of their respective owners. © 8.2021 A800