

# AL1012ULX Series

## Power Supply/Chargers

Altronix AL1012ULX series power supply/chargers convert a 115VAC, 60Hz input into a single fused, four (4), eight (8) or sixteen (16) fuse or PTC protected outputs. Outputs are 12VDC with a total of 10A max.



AL1012ULXPD16

### Key Features

- Available with 1, 4, 8 or 16 outputs
- Fused or PTC protected outputs
- Supervision
  - AC Fail;
  - Battery Fail and Battery Presence
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Short circuit and overload protection
- AC input and DC output options
- UL Listed in the U.S. and Canada
- CSFM and MEA Approved
- Lifetime Warranty

### AL1012ULX Series Power Supply Configuration Reference Chart

Altronix Model Number	Total Output Rating (A)	Input Rating: 115VAC, 60Hz	Input Fuse Rating	Power Supply Battery Fuse Rating	Power Distribution Module(s)	Number of Outputs	Class 2 Rated Power-Limited Output(s) (auto-resettable)	Fused Outputs Ratings	PTC Outputs Ratings
AL1012ULX	10A	2.6A	5A/ 250V	15A/ 32V	-	1	-	10A	-
AL1012ULXPD4					PD4UL	4	-	3.5A	-
AL1012ULXPD4CB					PD4ULCB	4	✓	-	2.5A
AL1012ULXPD8					PD8UL	8	-	3.5A	-
AL1012ULXPD8CB					PD8ULCB	8	✓	-	2.5A
AL1012ULXPD16					Two (2) PD8UL	16	-	3.5A	-
AL1012ULXPD16CB					Two (2) PD8ULCB	16	✓	-	2.5A

#### Lifetime Warranty



# AL1012ULX Series

Power Supply/Chargers

## Specifications

### Input

Voltage 115VAC, 60Hz, 2.6A max.  
Fusing 5A / 250V

### Outputs

Voltage 12VDC  
Current 10A @ 12VDC continuous max.  
Protection Fused 3.5A / PTC 2.5A  
Other Overvoltage protection  
Filtered and regulated

### Battery Charging

Capacity 12AH/12VDC (1 within enclosure)  
40AH/65AH (requires separate enclosure)  
Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous  
Batteries are sold separately

### Supervision

AC Failure Form "C" contacts  
Battery Form "C" contacts

### Indicators (LED)

Input 115VAC is present  
DC Output Powered  
Battery Discharged or not connected

## Agency Listings

UL:  
**UL294** Access Control System Units  
cUL:  
CSA C22.2 No.205 Signal Equipment

## Physical and Environmental

Enclosure:  
15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)  
Shipping:  
16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

### Weight (approx.)

Model	Product Weight	Shipping Weight
AL1012ULX	8.85 lb. (4.0 kg)	11.15 lb. (5.1 kg)
AL1012ULXPD4(CB)	9.0 lb. (4.1 kg)	11.3 lb. (5.13 kg)
AL1012ULXPD8(CB)	9.1 lb. (4.13 kg)	11.4 lb. (5.17 kg)
AL1012ULXPD16(CB)	9.3 lb. (4.22 kg)	11.6 lb. (5.26 kg)

### Temperature

Operating: 0°C to 49°C (32°F to 120°F)  
Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity 85% +/- 5%


BTU/Hr. (approx.): 61 BTU/Hr.

### Lifetime Warranty

### Dimensions and Drawing

Dimensions (H x W x D approximate)

15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

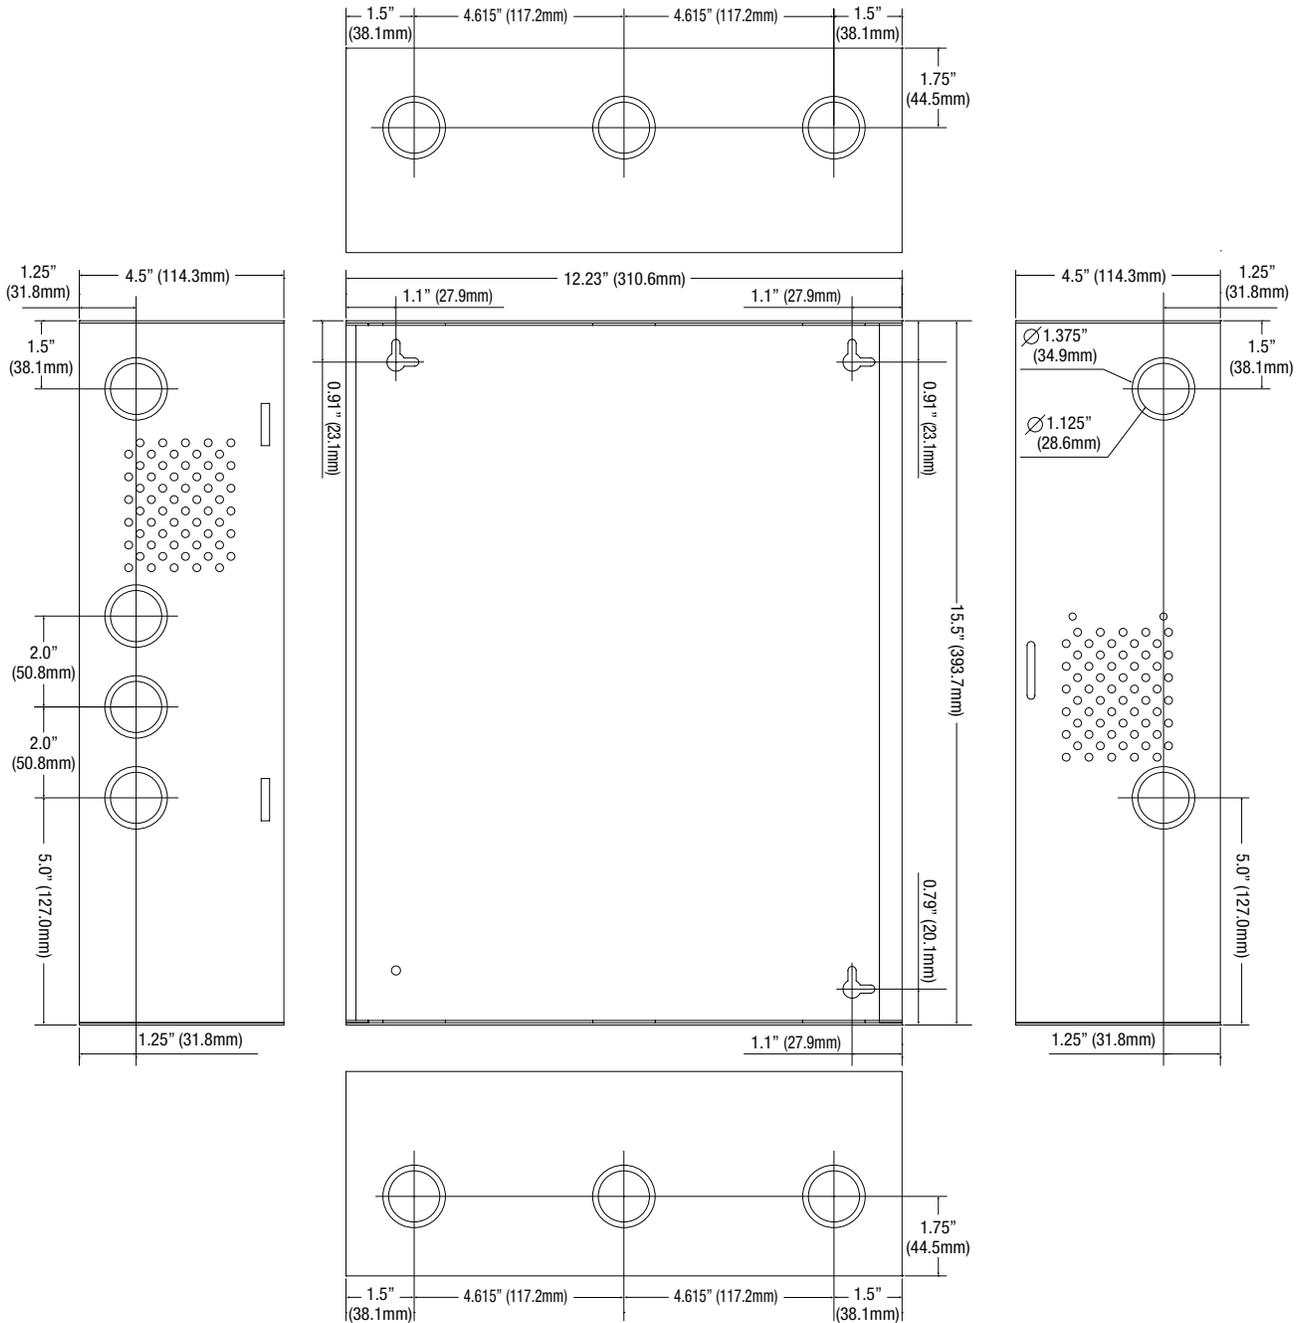

### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com