

# AL201UL

## Access Control Power Supply/Charger

Altronix AL201UL single output Power Supply/Charger converts a low voltage input into a Class 2 Rated power-limited auto-resettable 12VDC output.



AL201UL

### Specifications

#### Input

Voltage 24VAC, 40VA from  
UL Listed, Class 2 transformer

#### Output

Class 2 Rated power-limited auto-resettable output  
Voltage 12VDC  
Current 1.75A supply current  
Other Short circuit and thermal overload protection  
Filtered and regulated

#### Battery Charging

Type Sealed lead acid or gel type  
Failover Upon AC loss, instantaneous  
Batteries are sold separately

#### Supervision

AC Failure Form "C" contacts  
Low Battery Form "C" contacts

#### Indicators (LED)

Input Input voltage is present  
DC Output Powered

#### Agency Listings

UL  
UL294 (Access Control)  
UL603 (Power Supplies for Use with  
Burglar Alarm Systems)

#### Physical and Environmental

##### Dimensions (H x W x D)

Enclosure:  
8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)  
Shipping:  
13" x 10" x 7" (330.2mm x 254mm x 177.8mm)

##### Weight (approx.)

Product: 4.25 lb. (1.93 kg)  
Shipping: 4.75 lb. (2.15 kg)

##### Temperature

Operating: 0°C to 49°C (32°F to 120°F)  
Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%


BTU/Hr. (approx.) 11 BTU/Hr.

#### Lifetime Warranty

**Dimensions and Drawing**

Dimensions (H x W x D approximate)

8.5" x 7.5" x 3.5" (215.9mm x 190.5mm x 88.9mm)

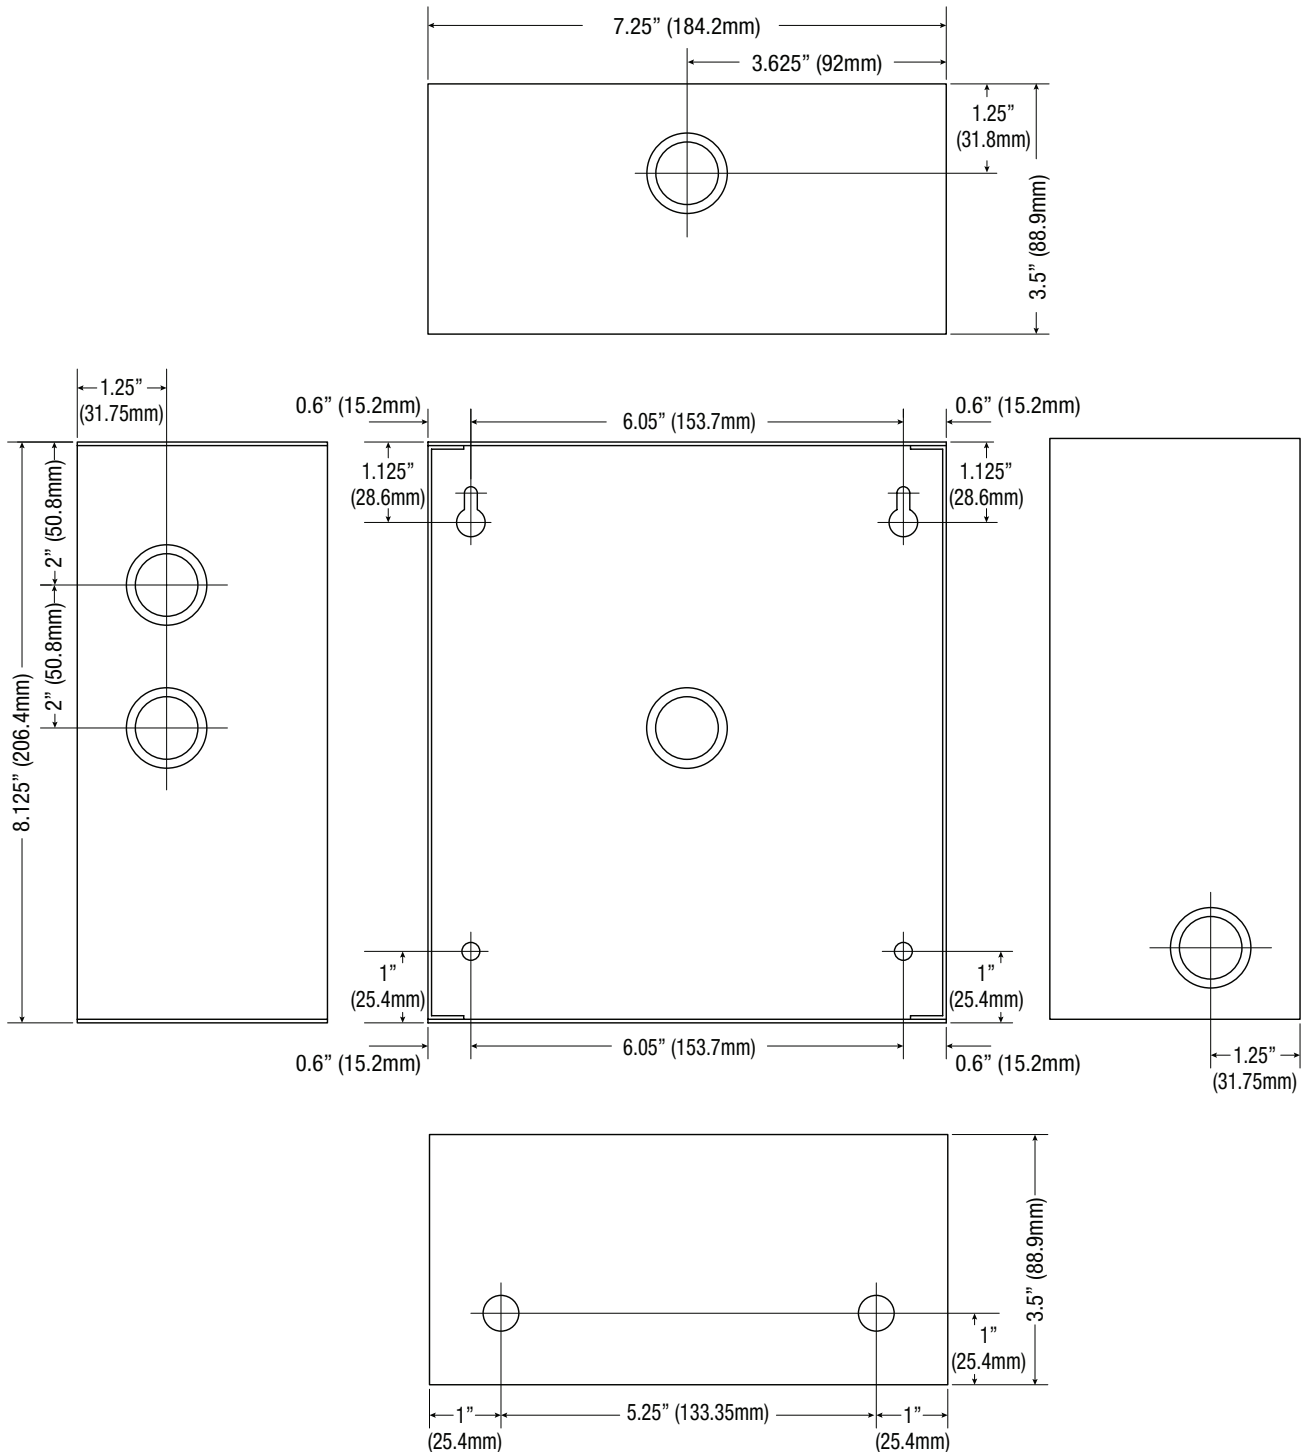

**Lifetime Warranty**