

AL400ULX Series

Power Supply/Chargers

Altronix AL400ULX series power supply/chargers convert a 115VAC, 60Hz input into a single fused, four (4), eight (8) or sixteen (16) fuse or PTC protected outputs. Outputs are selectable for 12VDC with a total of 4A max. or 24VDC with a total of 3A max.



AL400ULPD8

Key Features

- Available with 1, 4, 8 or 16 outputs
- Fused or PTC protected outputs
- Supervision:
 - AC Fail
 - Battery Fail and Battery Presence
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Short circuit and overload protection
- AC input and DC output options
- UL Listed in the U.S. and Canada
- CSFM and MEA Approved
- Lifetime Warranty
- All units are available in grey or red enclosure*

*AL400ULXJ's enclosure is red. For grey enclosure order model AL400ULXJG

AL400ULX Series Power Supply Configuration Reference Chart

Altronix Model Number	Input Rating: 115VAC, 60Hz	Input Fuse Rating	Power Supply Output Fuse Rating	12VDC Total Output Rating (A)	24VDC Total Output Rating (A)	Power Distribution Module	Number of Outputs	Fused Output Ratings	PTC Auto-Resettable Outputs Ratings	Accommodates Batteries
AL400ULX	3.5A	5A/250V	15A/32V	4A	3A	N/A	1	3.5A	-	Two (2) 7AH
AL400ULXX										Two (2) 12AH
AL400ULXJ(G)										Two (2) 18AH
AL400ULPD4						PD4UL	4	3.5A	-	Two (2) 7AH
AL400ULXPD4										Two (2) 12AH
AL400ULPD4CB						PD4ULCB	4	-	2.5A	Two (2) 7AH
AL400ULXPD4CB										Two (2) 12AH
AL400ULPD8						PD8UL	8	3.5A	-	Two (2) 7AH
AL400ULXPD8										Two (2) 12AH
AL400ULPD8CB						PD8ULCB	8	-	2.5A	Two (2) 7AH
AL400ULXPD8CB										Two (2) 12AH
AL400ULXPD16						Two (2) PD8UL	16	3.5A	-	Two (2) 12AH
AL400ULXPD16CB						Two (2) PD8UL	16	-	2.5A	Two (2) 12AH

Lifetime Warranty



AL400ULX Series

Power Supply/Chargers

Specifications

Input

Voltage 115VAC, 60Hz, 3.5A max.
Fusing 5A/250V

Outputs

Voltage 12VDC or 24VDC selectable
Current 4A @ 12VDC or 3A @ 24VDC continuous max.
Protection Fused 3.5A / PTC 2.5A
Other Overvoltage protection
Filtered and regulated

Battery Charging

Capacity 7AH/12VDC (1 or 2 within enclosure)
12AH/12VDC (requires larger "X" enclosure)
18AH/12VDC (requires larger "J" enclosure)
40AH/65AH (requires separate enclosure)
Type Sealed lead acid or gel type
Fuse Rating 15A/32V
Failover Upon AC loss, instantaneous
Batteries are sold separately

Supervision

AC Failure Form "C" contacts
Battery Form "C" contacts

Indicators (LED)

Input 115VAC is present
DC Output Powered
Battery Discharged or not connected

Agency Listings

All Models:

UL:

UL294 Access Control System Units
UL603 Power Supplies for Use with Burglar-Alarms Systems
UL 1069 UL Listed Hospital Signaling and Nurse Call Equipment
UL1481 Power Supplies for Fire Protective Signaling Systems

cUL:

CSA C22.2 No.205 Signal Equipment
CSA Standard C603-M1988 Burglar Alarm System

Agency Listings (cont'd)

AL400ULX and AL400ULXX only:

CSFM California State Fire Marshall Approved
MEA NYC Department of Buildings Approved

AL400ULX only:

FM Factory Mutual Approved

Physical and Environmental

Dimensions (H x W x D)

AL400ULX, AL400ULPD4(CB), AL400ULPD8(CB):

Enclosure: 13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.6mm)
Shipping: 15" x 13.875" x 4.75" (381mm x 352.4mm x 120.6mm)

AL400ULXX, AL400ULXPD4(CB),

AL400ULXPD8(CB), AL400ULXPD16(CB):

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)
Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

AL400ULXJ(G):

Enclosure: 18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)
Shipping: 21.75" x 18.25" x 5.75" (552.5mm x 463.6mm x 146.1mm)

Weight (approx.)

Model	Product Weight	Shipping Weight
AL400ULX	6.95 lb. (3.15 kg)	8.75 lbs. (4.0 kg)
AL400ULXX	8.55 lb. (3.88 kg)	10.85 lb. (4.92 kg)
AL400ULXJ(G)	11.5 lb. (5.22 kg)	13.7 lb. (6.21 kg)
AL400ULPD4(CB)	7.1 lb. (3.22 kg)	8.9 lb. (4.04 kg)
AL400ULXPD4(CB)	8.4 lb. (3.81 kg)	10.65 lb. (4.83 kg)
AL400ULPD8(CB)	7.2 lb. (3.27 kg)	9.0 lb. (4.08 kg)
AL400ULXPD8(CB)	8.45 lb. (3.83 kg)	10.7 lb. (4.85 kg)
AL400ULXPD16(CB)	8.55 lb. (3.88 kg)	10.85 lb. (4.92 kg)

Temperature

Operating: 0°C to 49°C (32°F to 120°F)
Storage: - 20°C to 70°C (- 4°F to 158°F)

Relative Humidity

85% +/- 5%

BTU/Hr (approx.)

12VDC: 25 BTU/Hr.
24VDC: 37 BTU/Hr.

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com






AL400ULX Series

Power Supply/Chargers

Dimensions and Drawing

AL400ULX, AL400ULPD4(CB), AL400ULPD8(CB) Dimensions (H x W x D approximate)

13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.6mm)

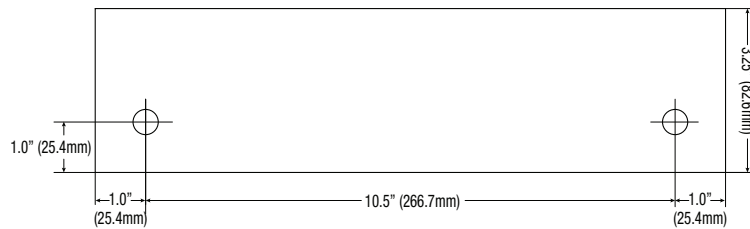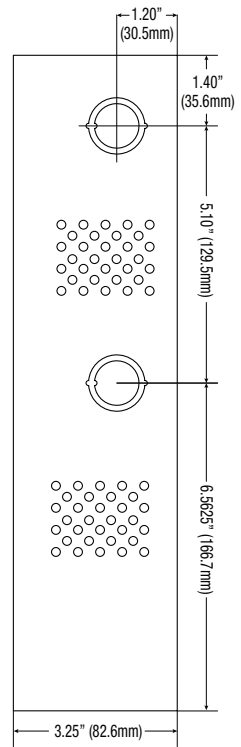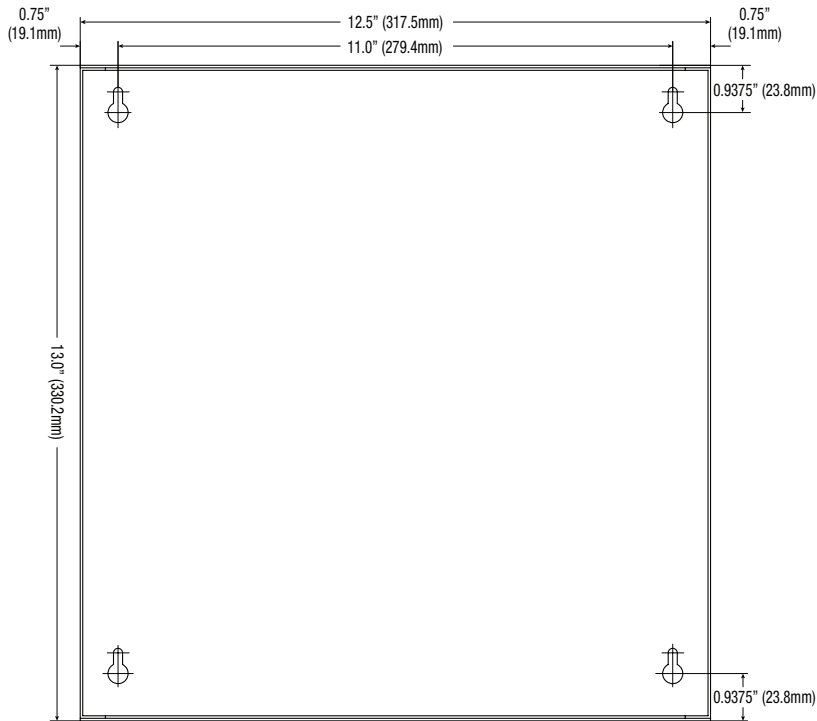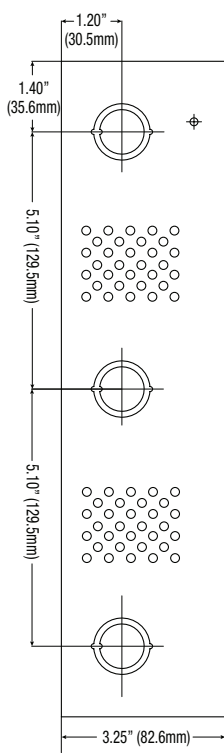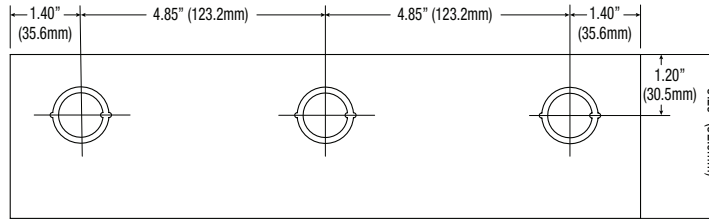


Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com

Dimensions and Drawing

AL400ULXX, AL400ULXPD4(CB), AL400ULXPD8(CB), AL400ULXPD16(CB) Dimensions (H x W x D approximate)
 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

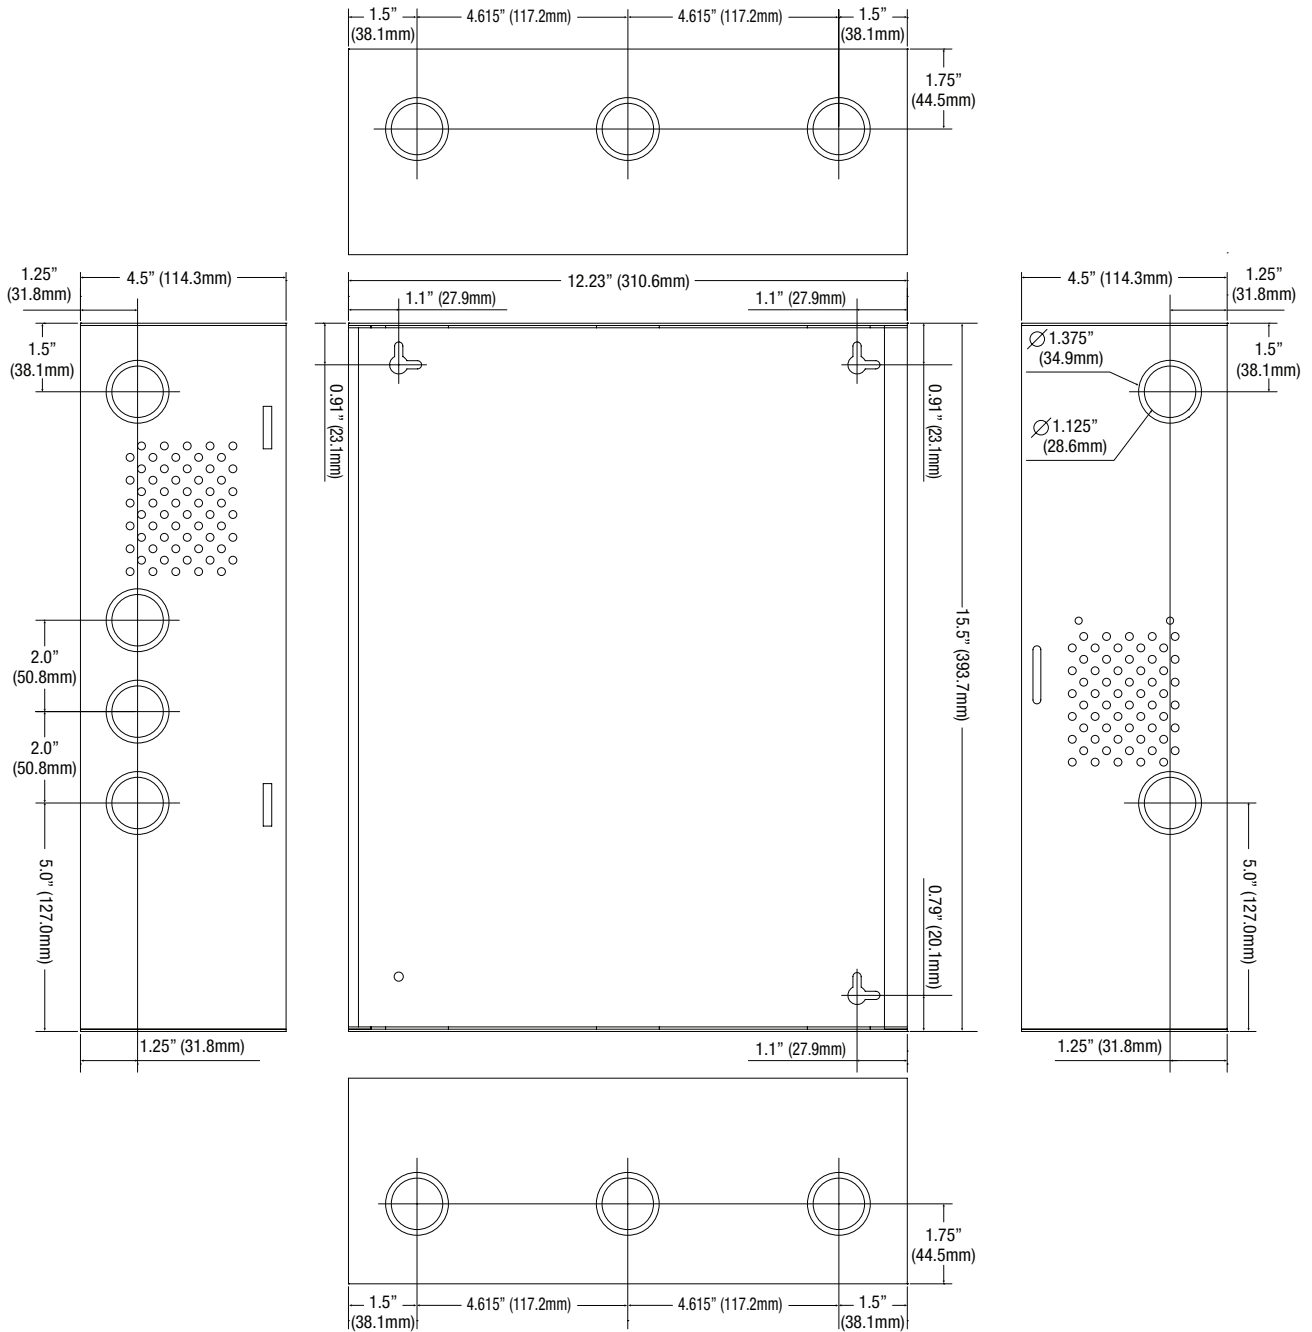

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com


AL400ULX Series

Power Supply/Chargers

Dimensions and Drawing

AL400ULXJ(G) Dimensions (H x W x D approximate)

18" x 14.5" x 4.625" (457.2mm x 368.3mm x 117.5mm)

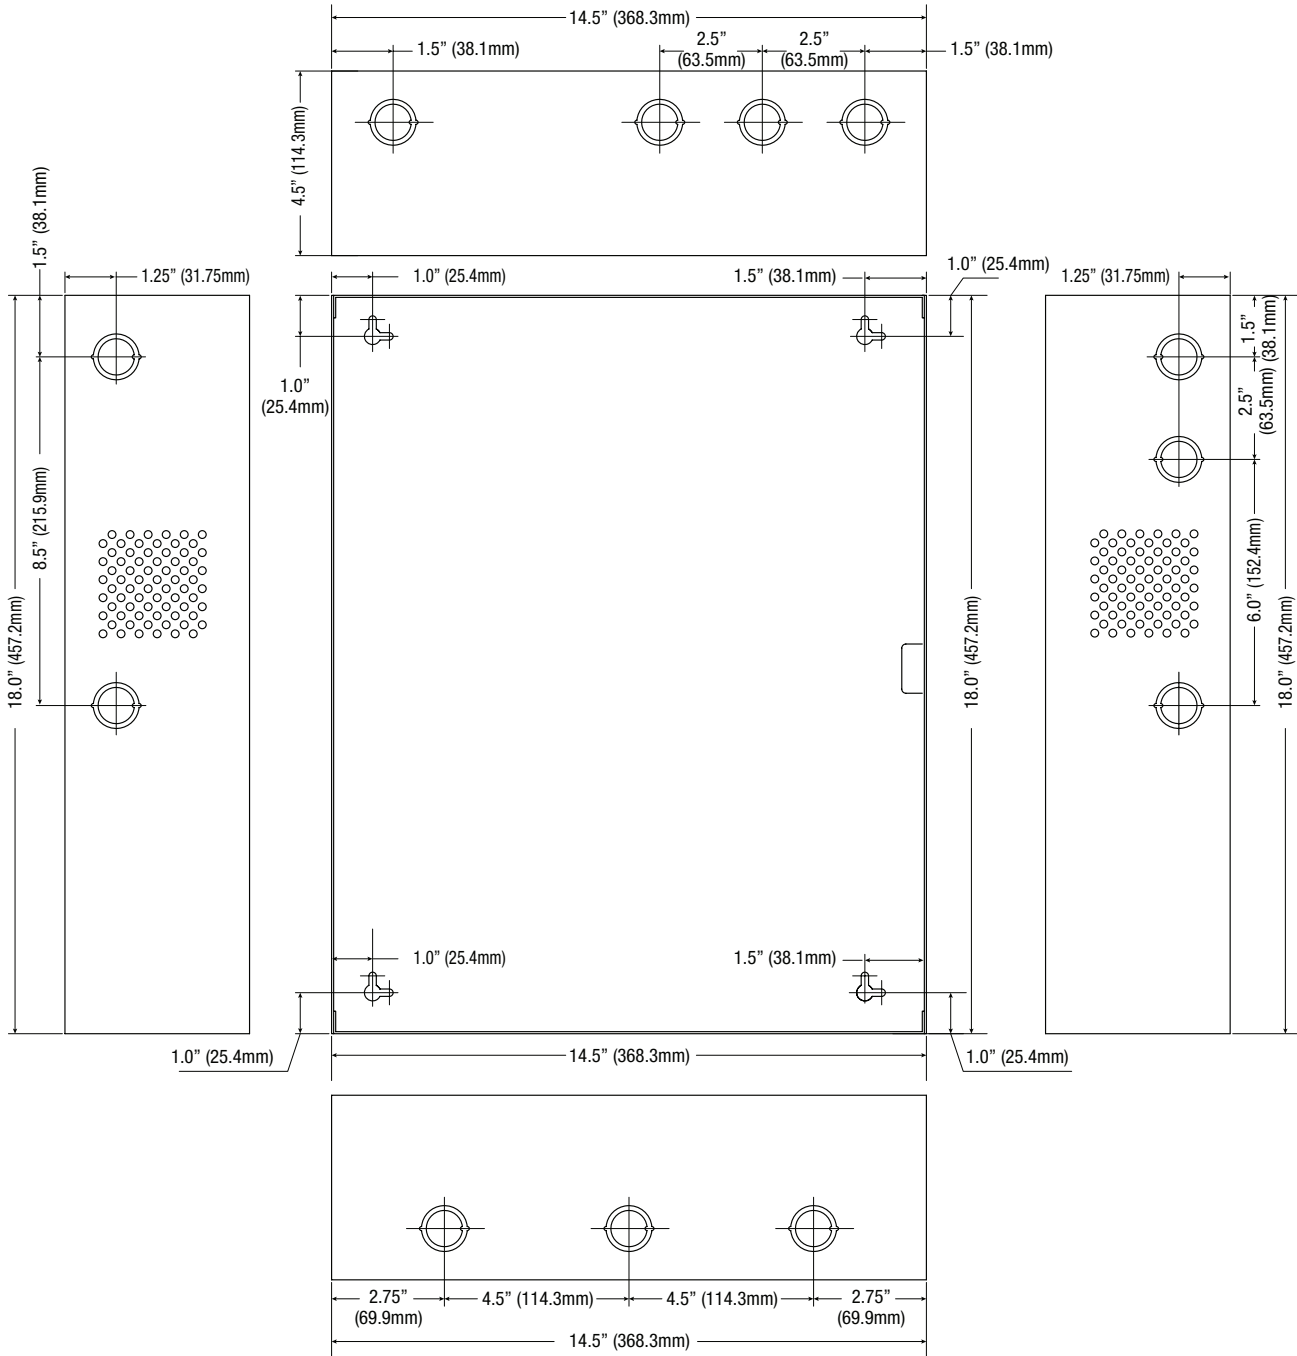

Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: info@altronix.com | www.altronix.com