


# PD4UL

## UL Listed Power Distribution Module

Altronix PD4UL UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into four (4) individually fuse protected outputs.

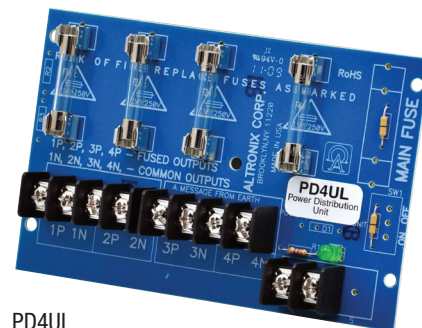

PD4UL

### Specifications

#### Input

Voltage Range            12VDC or 24VDC, up to 10A or  
24VAC or 28VAC, up to 12A

#### Outputs

Four (4) fuse protected outputs  
2.5A per output max.  
Total output current should not exceed max current rating of  
power supply employed  
Fuses are rated @ 3.5A/250V

#### Indicators (LED)

DC Output                    Power LED

### Agency Listings

#### UL:

UL294                        Access Control  
UL603                        Burglar Alarm  
UL1481                       Fire Alarm

#### cUL:

General Signaling Equipment Evaluated to  
CSA Standard C22.2 No.205-M1983  
Power Supplies for Burglar Alarm Systems ULC-5318-96

### Physical and Environmental

#### Dimensions (L x W x H)

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

Product Weight            0.15 lb. (0.07 kg)

Shipping Weight           0.25 lb. (0.11 kg)

#### Temperature

Operating                    0°C to 49°C (32°F to 120°F)

Storage                        -20°C to 70°C (-4°F to 158°F)


Relative Humidity           85% +/-5%

Mounting hardware included

### Lifetime Warranty

**Board Dimensions (L x W x H) and Drawing**

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm)

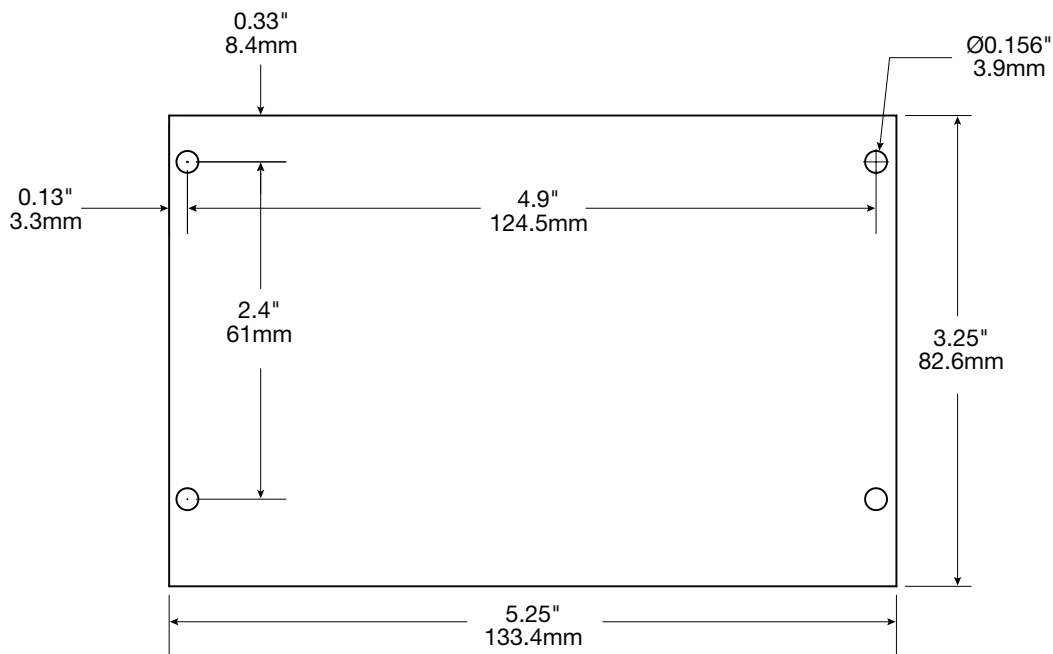

**Lifetime Warranty**