


RCI 910TC

Touchless actuator



Features

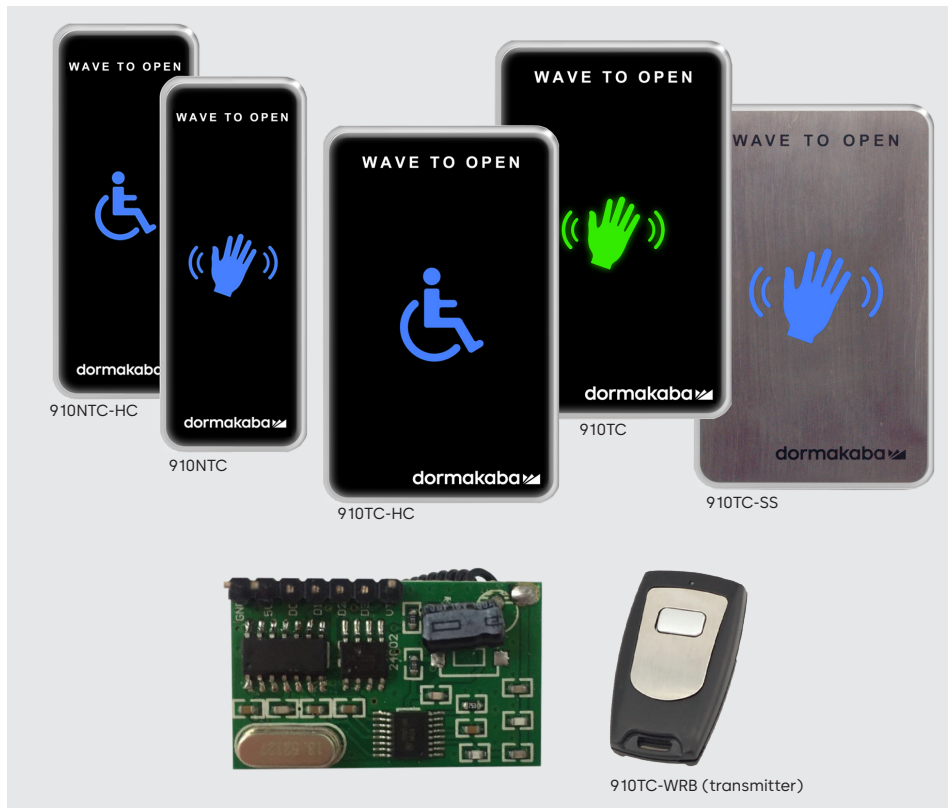







- Unique low-profile touchless actuator plate utilizing capacitive technology for the activation of automatic doors
- Aesthetically pleasing design
- Hands-free – helps reduce the spread of germs and bacteria
- Adjustable detection zone to reduce unwanted activations
- When device is activated, the indicator light will change color
- Option to disable audible indicator
- Secondary Normally Open (NO) mechanical switch in the event of a power loss
- Selectable unlock times (1-63 seconds)
- Available in narrow (mullion) or standard size
- Standard mounts to single-gang electrical box
- Available remote control to trigger switch remotely
- Available in kit options
- Also available with french language plates
- Option to toggle momentary to maintained
- FCC & ISED Certified
- Meets ADA compliance (check local building codes for compliance)

The RCI 910TC touchless actuator is designed for touchless door activation in any facility. It functions by triggering activation of automatic door openers by hand gesture or use of a remote fob. It can make the difference when it comes to a


clean, hygienic facility. The 910TC is ideal for use in healthcare facilities, restaurants, schools, offices and restrooms by minimizing touchpoints.

Accessories

- 910TC-WRM
- 433MHz Remote Receiver Module
- 910TC-WRB
- 433MHz Remote Transmitter

 Energy standard 12-24VDC 50mA@12VDC	Activated 115mA@12VDC	 Range 1" to 2" (30mm - 50mm)	 Warranty 3 Year limited warranty	 Audible indicator disable option
 Switch mode momentary	 Switch configuration SPDT	 FCC & ISED Certified	 Toggle momentary maintained option	


Dimensions - standard & narrow (mullion)

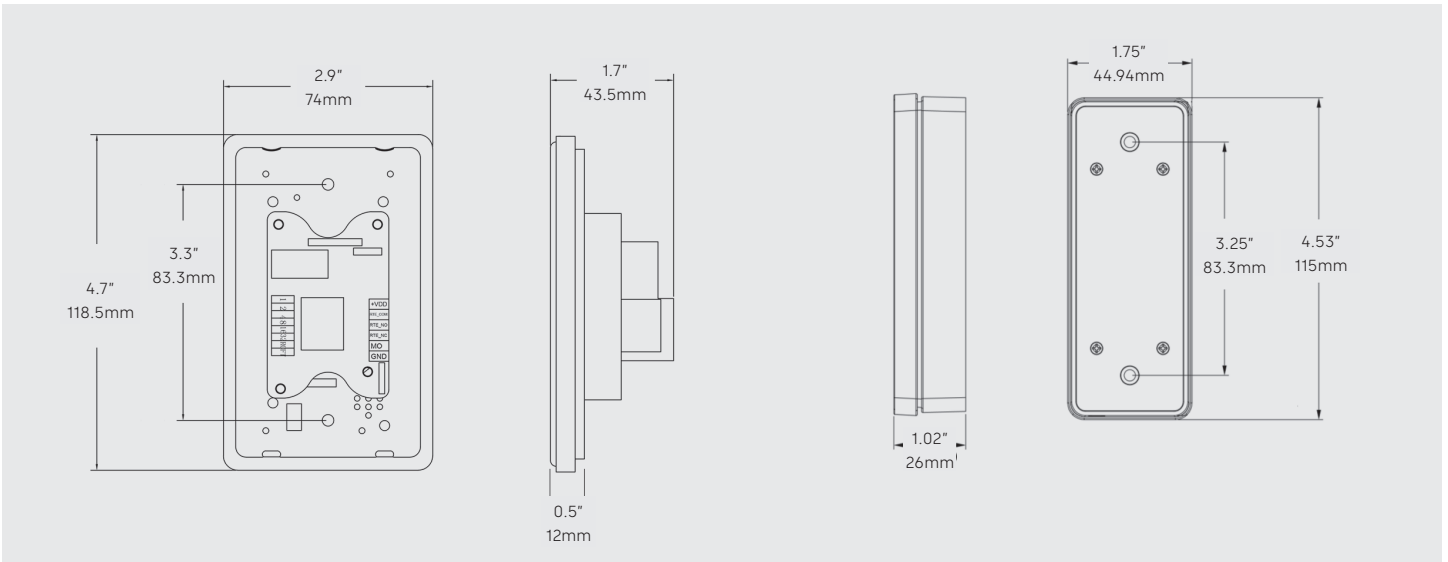

Specifications

Technology type	Capacitive sensing Capacitive sensing with infrared technology
Detection mode	Proximity
Detection zone	Maximum detection zone of up to 2" (50mm)
Current	50mA (typical)/ 115mA (activated) 115mA (narrow)
Voltage	12-24VDC
Temperature range	-4° F to 140° F (-20°C to +60°C)
Relay	Form C SPDT 24VDC @ 100mA
Certification & listings	Standard & narrow both FCC & ISED certified ADA compliant

How to order

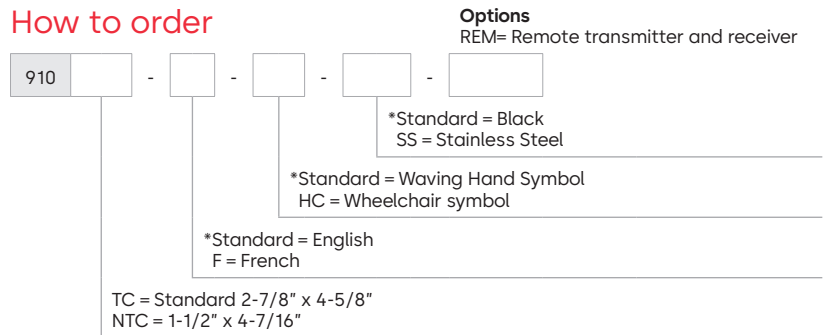

Example 910NTC-HC-REM
910 Narrow with wheelchair black c/w transmitter and receiver

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.
Contact us at: 1-800-265-6630