



### DESCRIPTION

The GT-TLI-IP is an IP adaptor for the GT Series that will allow mobile devices running the “AiphoneGT” app to be connected to answer a call from a visitor and open the door. The GT-TLI-IP adaptor comes with the instructions to connect up to 3 instances of the mobile app. The GT-TLI-IP can be included in a tenant space with another GT Series tenant station or it can be used stand-alone so the apps are the only option to answer/release the entrance door.

A working GT system with at least one entrance panel is required when using the GT-TLI-IP VoIP interface adaptor. The GT-TLI-IP can be wall mounted using the mounting slots on the back of the unit. Ensure that the mounting location is accessible.

The “AiphoneGT” App is free from Gega Electronique and is available on the Google Play™ Store and Apple App Store<sup>SM</sup>.


### FEATURES

- 12V DC Power Supply Included
- 1 Contact Input
- 3 Relay outputs
- 24V DC 1A relay contact rating
- Supports up to 3 Mobile Apps
- App available for both iOS and Android
- Addressed to the entry panel like a GT Video Tenant Station

# GT-TLI-IP

## VoIP Interface for the GT Series

### FEATURE CALL-OUT

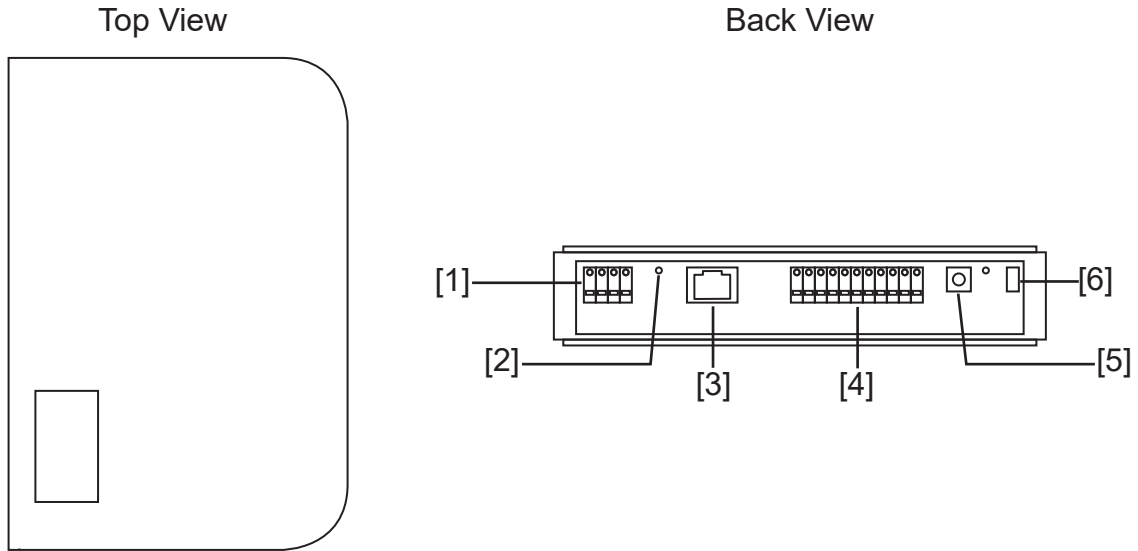

### FEATURE CALL-OUT DEFINITIONS

- [1] R1/R2 & B1/B2 Connections
- [2] Programming button
- [3] LAN Port
- [4] Relay Outputs / Contact Input
- [5] 12V DC Power Input
- [6] Power Switch

### SPECIFICATIONS

- Power Source: 12V DC, 500mA  
(Power Supply Provided)
- Power Draw: Standby: 350mA  
Active relay: 430mA
- Relay Outputs: 12V DC, 2A; 24V DC, 1A
- Connections: 1 Cat-5e/6 Ethernet  
2 two conductor cables for GT  
(audio-872002, video-871802)
- Operating Temp: 32°F - 140°F (0°C - 40°C)
- Dimensions: 10-1/4" x 7-1/16" x 2-1/16"
- Weight: 1.35lbs