




IA-HDBAL4K

CCTV Hybrid Balun EX-SDI/TVI/CVI/AHD/4K/1080P

Features

- Hybrid Passive Balun/No Power Required
- Real-time Transmission over UTP cat5e/6
- Compatible with all HD-TVI,CVI AHD,EX-SDI,4K analog camera
- Stackable Design, Extend One Channel to Multi-Channel
- RJ45 Jack for UTP cable
- Super Interference Rejection
- Transmission Signal: 1080P, Max.250M 720P, Max.300M 4K, Max 200M
- Built-in Surge & Transient Protection & Lightning Protection

Model Number	IA-HDBAL4K
Transmission distance	720P:300m (max) 1080P:250m (max) 4K:200m (max)
Category Type	UTP CAT5/5E/6
Impedance	Coax, Male BNC 75 ohms unbalanced UTP, RJ45 100 ohms balanced
Video Input/Output	Male BNC Connector
Video Input/Output	Twisted-pair
Coaxial cable connector	2KV (common-code) Per: IEC1000-4-
Size of Casing	3.5 x 5.04 x 1.06 in (90*128*27mm)
Shell	ABS+PC
Color	Black
N. W.	.055 lb (25g)
MTBF	>10000H
Operating Temperature	14°F ~ 131°F (-10°C~55°C)
Humidity	0-95% (non-condensing)

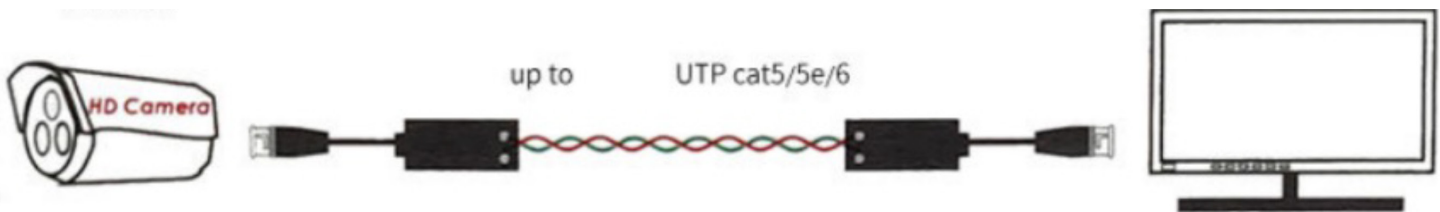

Ordering Information
IA-HDBAL4K: CCTV Hybrid Balun