



DESCRIPTION

The JO Series is a 1 x 2 system which features a 7" screen with electrostatic touch buttons and door release. The JO master is less than an inch thick and allows VOX or PTT communication. The JO Series is available in three easy to install kits, each featuring a single master station, a power supply, and one of three different door stations.

The JOS-1A kit includes the JO-DA surface mount plastic door station. The JOS-1V kit features the JO-DV surface mount door station with a zinc die cast faceplate. The JOS-1F kit contains the JO-DVF flush mount door station with a stainless steel faceplate.

The JO-1MD master station is included in all kits and the JO-1FD expansion station can be purchased separately. The system connects easily using 2-conductor to the door station and 6-conductor between internal stations.


FEATURES

- 7" Screen
- Slim design
- Hands-free communication
- Electrostatic touch buttons
- VOX or PTT Communication
- Two wire connection to door station
- Kits ensure correct system configuration

JO-1MD

JO Video Intercom Master Station

FEATURE CALL-OUT

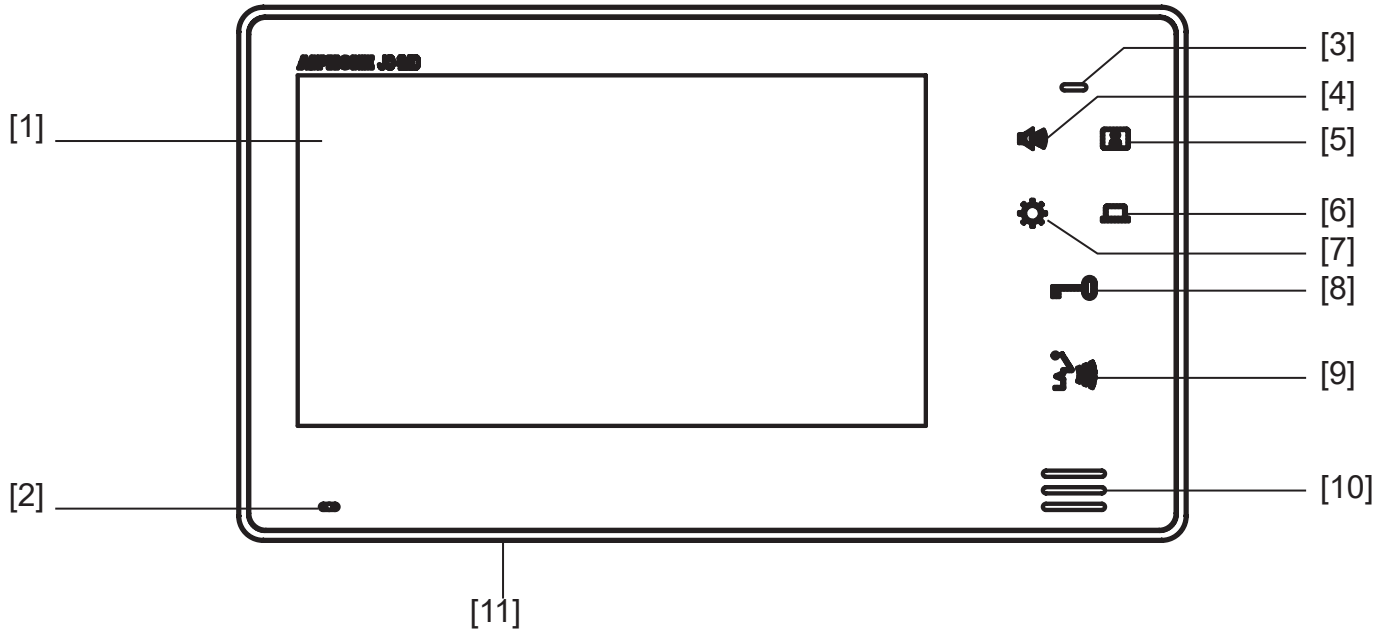

FEATURE CALL-OUT DEFINITIONS

- [1] LCD screen
- [2] Microphone
- [3] Status LED
- [4] Volume control button
- [5] Monitor button
- [6] Option button
- [7] Screen brightness control
- [8] Door release button
- [9] Talk/Off button
- [10] Speaker
- [11] Reset button

SPECIFICATIONS

Power source:	18V DC (PS-1820UL)
Current consumption:	Max. 410mA
Dry contacts:	N/O 24V AC/DC, 500mA
Communication:	Auto-voice actuation
Hands-free:	Press-to-talk, release to listen
Monitor:	7" TFT LCD
Mounting:	Wall mount
Electrical box:	3-gang box
Material:	Flame resistant ABS resin
Color:	White
Temperature:	32°F~104°F (0~40°C)
Dimensions:	5-1/8" H x 9-1/16" W x 13/16" D
Weight:	Approx. 1.04lbs (470g)