



DESCRIPTION

The JP-4HD is a video sub master station for use with the JP-4MED master station. A maximum of seven sub master stations can be used in the JP Series. The JP-4HD offers a 7" touchscreen LCD and allows for handset (duplex) and hands-free (VOX) communication.

This unit is equipped with a door release button for the user to allow visitor entry. The JP-4HD is also equipped with pan-tilt-zoom (PTZ) and brightness controls, giving the user control of the door station camera angle and camera lighting for better visibility.

The JP-4HD connects to either the master station or JP-8Z distribution unit using CAT-5e / CAT-6 cable.


JP-4HD FEATURES

- 7" touchscreen LCD
- Hands-free (VOX) or handset communication
- Door release button
- Optional service button
- PTZ and brightness control
- Selectable call tones (8)
- Station partitioning
- All call to inside stations
- Door monitoring
- Continuous room monitoring

JP-4HD

Sub-Master Station

FEATURE CALL-OUT

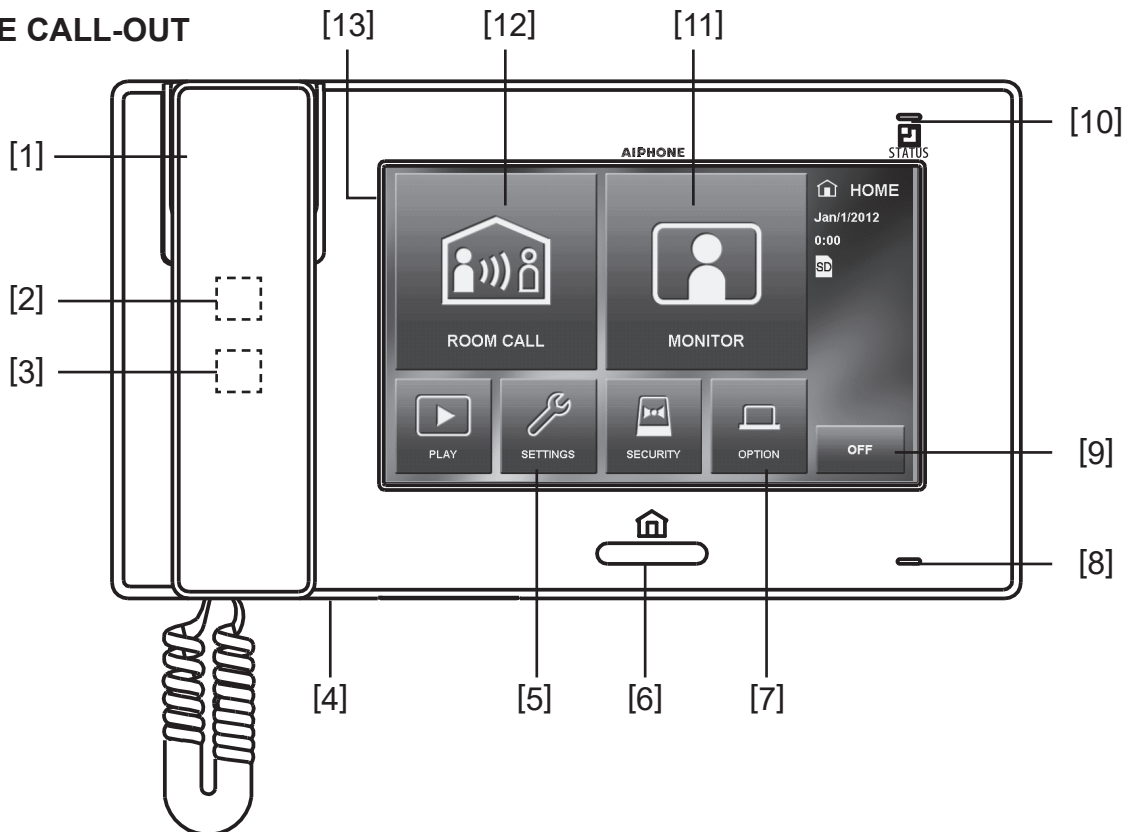

FEATURE CALL-OUT DEFINITIONS

- [1] Handset
- [2] Speaker
- [3] Hearing aid T-mode symbol
- [4] Reset button
- [5] Settings button (touchscreen)
- [6] Home button
- [7] Option button (touchscreen)
- [8] Microphone
- [9] Off button (touchscreen)
- [10] Status LED
- [11] Monitor button (touchscreen)
- [12] Room call button (touchscreen)
- [13] LCD touchscreen

SPECIFICATIONS

- Power Source:** 24V DC - use PS-2420UL
- Consumption:** 200mA (max)
- Communication:**
 - Handset** Simultaneous communication
 - Hands-free** Auto-voice actuation
- Monitor:** 7" TFT touchscreen LCD
- Pixels:** 800 x 480
- Mounting:** Surface wall mount or desk mount using MCW-S/A (sold separately)
- Temperature:** 32~104°F (0~40°C)
- Dimensions:** 5-11/16" H x 10-1/16" W x 1-7/8" D
- Weight:** Approx. 1.72 lbs (780g)