


Electric Transfer Hinge

SD-H412

The ENFORCER SD-H412 Electric Transfer Hinge provides a vandal-resistant method for protecting and concealing wires between a hollow door and door frame. It is suitable for low-voltage, low-current applications such as electric door strikes, locksets, and deadbolts or other monitoring or exit devices and is easily installed, replacing the center hinge.

Features:


- 12 or 24 VAC/VDC operation
- 4 Conductive wires – 4x 28AWG wires, 0.5A@24VAC/VDC
- Standard 5-knuckle hinge
- Provides power and data transfer
- Replaces one of the standard door hinges on a hollow door
- Heavy-duty, vandal-resistant steel housing protects and hides the wires
- US26D (652)

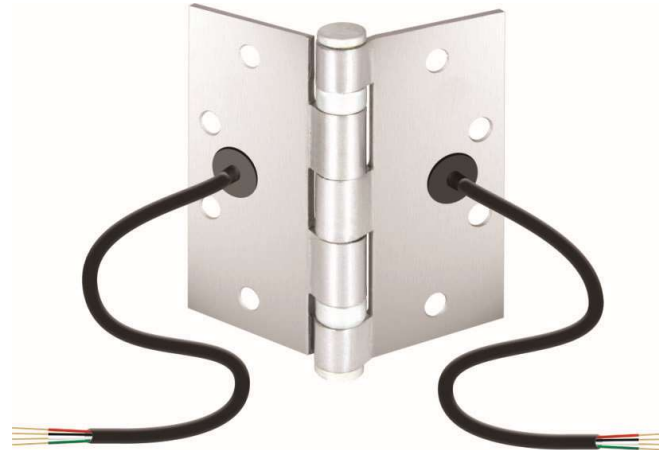

Specifications:

Type	5-knuckle, 4-wire transfer hinge with concealed wiring	
Operating voltage	12~24 VAC/VDC	
Current	28AWG	0.5@24VAC/VDC
Wires	4x 28AWG (red, black, white, green)	
Operating temperature	-4°~185° F (-20°~85°C)	
Dimensions	4 1/2" x 4 1/2" x 1/8"	
Weight	16-oz (454g)	

Sample Installation:

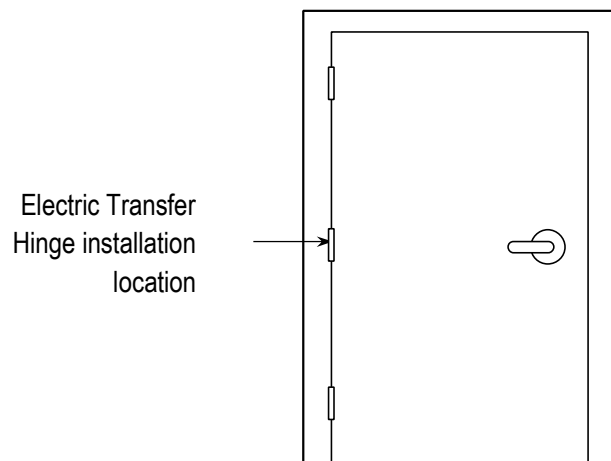

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright © 2019 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.
SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SD-H412_191120.docx