


Features

- 24 programmable push buttons for speaker zone and ECS message assignment.
- Includes bracket for secure and accessible mounting
- Maximum of four (4) SB-24's can be installed per IPA-4000V and LOC-1000

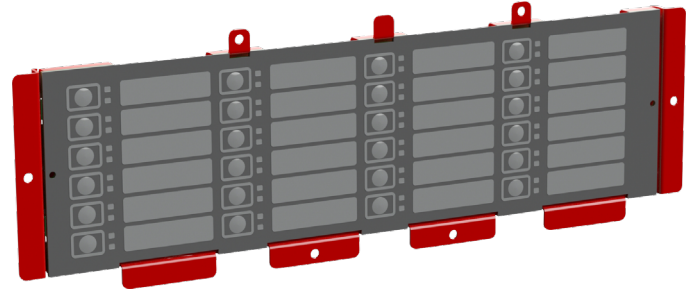

Description


The SB-24 provides 24 programmable push buttons for speaker zone and ECS message assignment. Each button has two corresponding status LEDs to indicate activity and trouble conditions. The SB-24 is equipped with a bracket for secure mounting. A maximum of four (4) SB-24's may be installed on the IPA-4000V and LOC-1000.

Technical Specifications

Standby Current	4 mA
Alarm Current	27 mA
Operating Temperature	0°C-49°C (32°F-120°F)
Operating Humidity Range	10%-93% @ 30°C (86°F) noncondensing humidity

Installation

The SB-24 connects to the SB-8 through a 10 pin ribbon cable. The connections are power limited and supervised. The SB-24 is equipped with a bracket to securely mount to the IPA-4000V and LOC-1000 dead front.

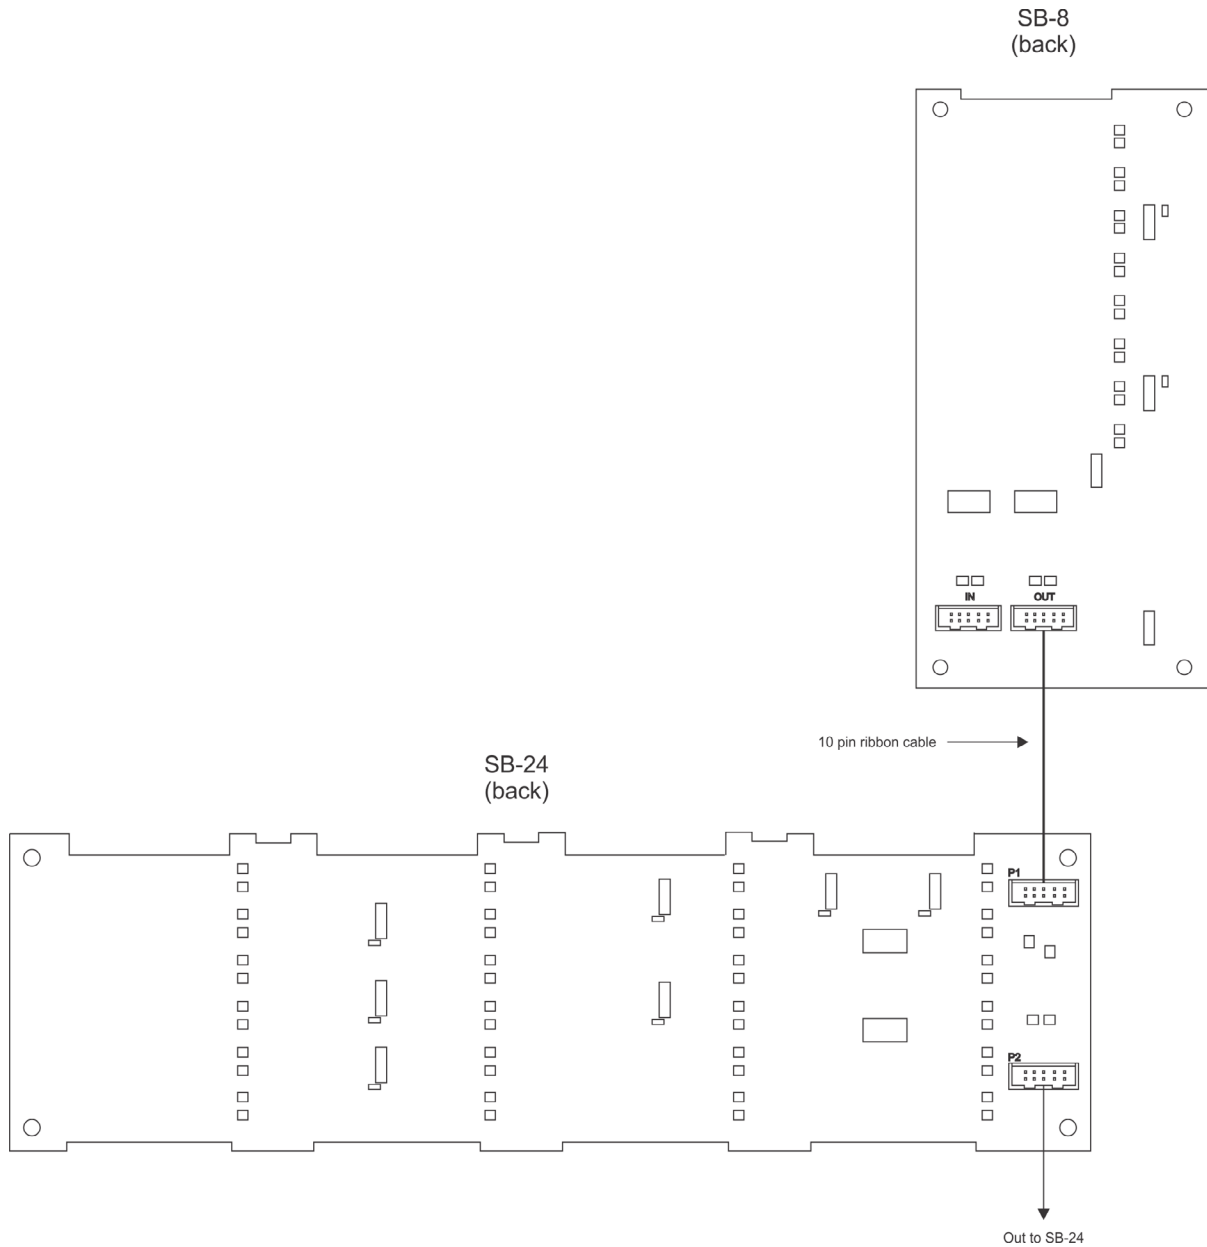

Ordering Information

Model	Description	Stock No.
SB-24	SB-24 SWITCH BOARD W/24 PROGRAMMABLE SWITCHES	3520652