

SD-70

RECESSED CONTACTS

.76"(19.3mm) Steel Door Recessed Type



Contact Size: .76"×.84"(19.3mm×21.3mm)

Standard Magnet Size: .76"×.84"(19.3mm×21.3mm)

Standard Gap: 1.1"(28mm)

Colors: White, Brown, Black

12"(305mm) 22 AWG Leads Standard

Longer leads available.

Specifications

Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
SD-70	1.1"(28)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-71	1.1"(28)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
SD-70 WG	1.26"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
SD-72	1.1"(28)	SPDT	SPDT	3	100	AC30/DC30	0.2
* SD-74	.75"(19)	DPDT	DPDT	3	100	AC30/DC30	0.2


OPERATING TEMPERATURE: -40°C to +60°C

*Not UL Listed

Outline Dimensions

Unit: inch(mm)

SD-70/SD-71

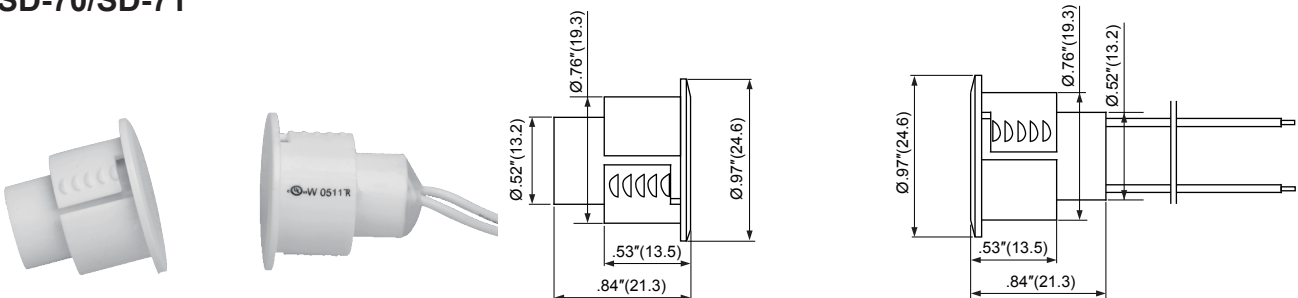

The Best Industry Guarantee Since 1984®
TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com


SD-70

RECESSED CONTACTS

Outline Dimensions


Unit: inch(mm)

SD-70 WB

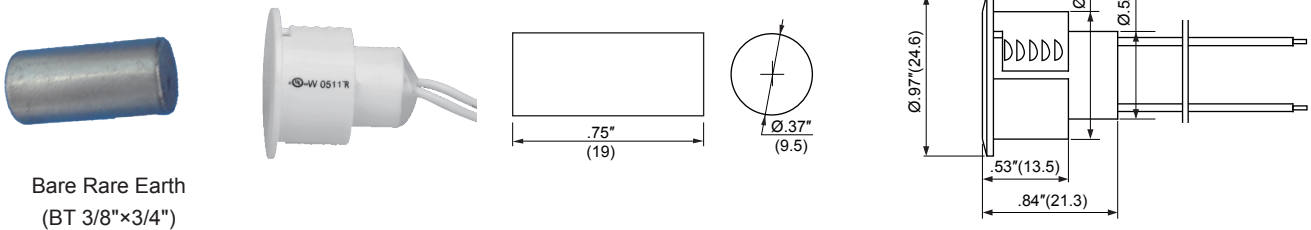


Bare Rare Earth
(BT 3/8"×3/4")

SD-72

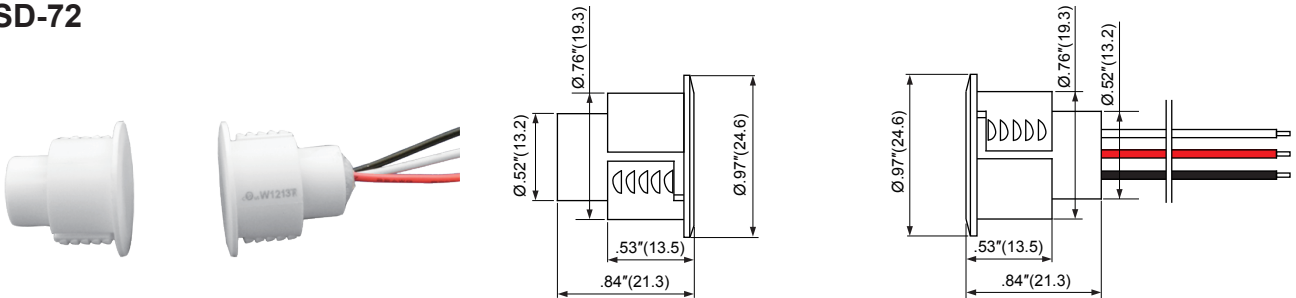


SD-74

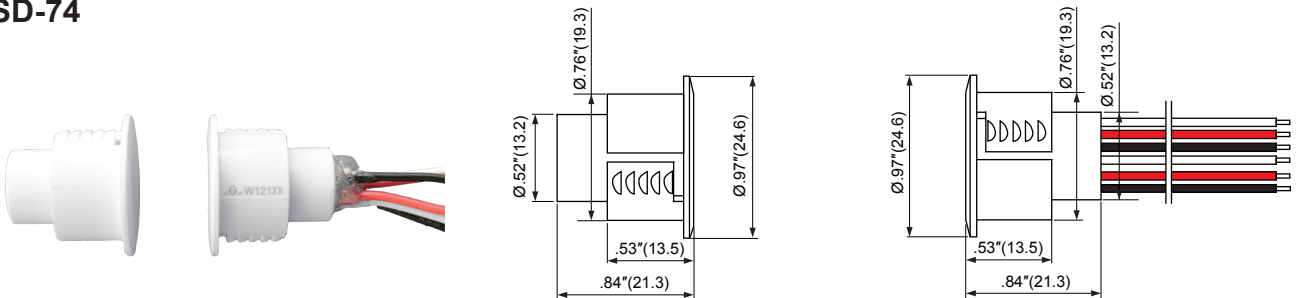


Wiring Diagram

SD-72

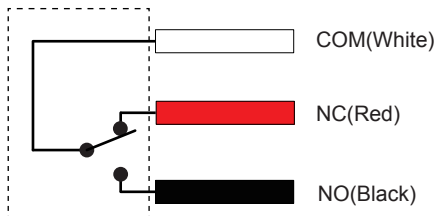

SD-74

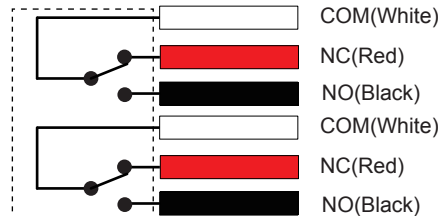

"We Contact The World"®

The Best Industry Guarantee Since 1984®
TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com