



### SEC-C5TXIR28


5-2 Megapixel Field Selectable TVI/AHD/CVI/CVBS, Outdoor Turret, 49' IR Range, DWDR, 12VDC

### SEC-C5TXIR28/JB1

5-2 Megapixel Field Selectable TVI/AHD/CVI/CVBS, Outdoor Turret, 49' IR Range, DWDR, 12VDC, with Included Junction Box

#### Features

- 5-2 Megapixel Field Selectable
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night
- D-WDR
- 49' Smart IR Range
- Up The Cable (UTC) Function
- IP66 Weather Resistant
- 12VDC Only Operation
- Through InVid Tech DVR: Free App, CMS & MAC Client
- NDAA Compliant

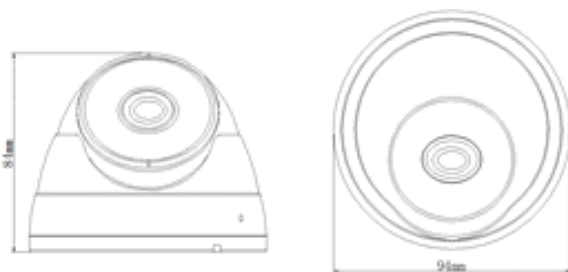

Camera	
Image Sensor	1/3" Progressive Scan CMOS
Signal System	PAL/NTSC
Min. illumination	0.05Lux @ (F1.2,AGC ON), 0 Lux with IR
SN	≥48dB
Day & Night	Auto,Color,B/W,Ext
Shutter Speed	PAL:1/25-1/10000 NTSC:1/30-1/10000
dWDR	OFF/ON
Digital Noise Reduction	1-16
Lens	2.8mm optional
FOV	93°
F	2.0
Language	Eng, Chin1, Chin2, Pycc, Italiano, Portuges
IR LED	18pcs
IR Wavelength	850nm
OSD	Support
MIRROR	DEFAULT/H/V/HV
IR Range	49ft (15m)
Image	
Effective Resolution	2560*1944
Frame	PAL: 25fps NTSC: 30fps
White Balance	Auto
Gain	Auto
Light Compensation	Auto
Video Output	
Max Distance	75-5 300m
Dip Switch	Yes
Output Interface	AHD/TVI: 5M 20/12.5fps 4M 25/30/15fps 1080P 25/30fps CVI: 4M 25/30fps CVBS: PAL/NTSC
Default Output	TVI: 5MP (by default) AHD: 2MP CVI: 2MP
General	
Power Supply	DC12V±10%
Power Consumption	3.6W(Max)
Operating Temperature	14°F~131°F (-10 ~+55 )
Operating Humidity	0% - 85% RH
Ingress Protection	IP66
Approvals	CE / FCC

#### Ordering Information

**SEC-C5TXIR28:** 5-2 Megapixel Field Selectable Turret, 2.8mm

**SEC-C5TXIR28/JB1:** 5-2 Megapixel Field Selectable Turret, 2.8mm with Included Junction Box

*InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.*