


5" 70/25V Pendant Mount Speaker

SP30PT White housing
SP30PTB Black housing

Features

- Attractive, 3-hook, enclosed ABS design
- 70/25V selectable transformer
- Press terminals for wiring
- Built-in safety loop for additional mounting security
- Includes 11.25" hanging apparatus
- Manufactured to comply with RoHS standards
- Lifetime warranty

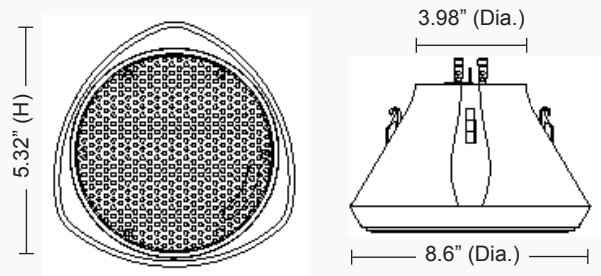

Specifications

RMS Power	30W
Max. Power.....	60W
Transformer Type	70/25V (selectable)
Transformer Power Type	30W, 15W, 7.5W, 5W, 2.5W, 1W, 0.5W, 0.25W & 8 Ohms
Termination Type	Press terminal
Sensitivity (1W/1M).....	92dB
Maximum SPL (Pax/1M).....	93.4dB
Driver Impedance	8 Ohms
Magnet.....	11 oz. ferrite
Frequency Response Range	90Hz ~ 20kHz
Dispersion @ 1000Hz.....	100° Conical
Driver.....	5" polypropylene woofer 0.5" mylar tweeter
Speaker Dimensions.....	3.98" (Dia.) top / 8.6" (Dia.) Bottom / 5.32" (H)
Mounting Dimensions	n/a
Minimum Mounting Depth.....	n/a
Weight	5 lbs.
Material.....	Body: ABS Grille: Metal

NDAA
COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines

Speco Technologies is constantly developing and improving products.
 We reserve the right to modify product design and specifications without notice
 and without incurring any obligation. Spec Rev. 3/9/22