

MODELS TS-14 and TS-14N

PNEUMATIC TIME DELAY REQUEST TO EXIT STATIONS



TS-14
Single Gang



TS-14N
1.75" Wide

Pneumatic time delay operator does not require power for timing function.

- 1.5" Green mushroom button
- One Normally-Open contact pair and one Normally-Closed contact pair
- Contacts rated 10A @ 35VDC
- Time range settable between 2 and 60 seconds
- Switch time is repeatable $\pm 10\%$
- Switch mounted on a single gang stainless steel electrical plate
- UL listed components
- Temperature range $+15^{\circ}\text{F}$ to $+120^{\circ}\text{F}$
- Switch depth 2.25" behind plate



Alarm Controls
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com

ASSA ABLOY, the global leader
in door opening solutions

**INSTALLATION INSTRUCTIONS
PNEUMATIC TIME DELAY SWITCH
MODELS
TS-14, TS-14N
TS-21RPN
TS-60**

| WIRING | | |
|------------|--------------|---------------------------|
| Wire Color | Designation | Notes |
| Red | N/C Contacts | Contacts rated 2A @ 28VDC |
| Blue | N/O Contacts | |

Mounting -


Unit should be mounted in a vertical position.

Time Adjustment -

Rotate knob clockwise for maximum time (60 seconds).

Rotate knob counter clockwise for minimum time (2 seconds).

Note: Switch time repeatability is $\pm 10\%$.

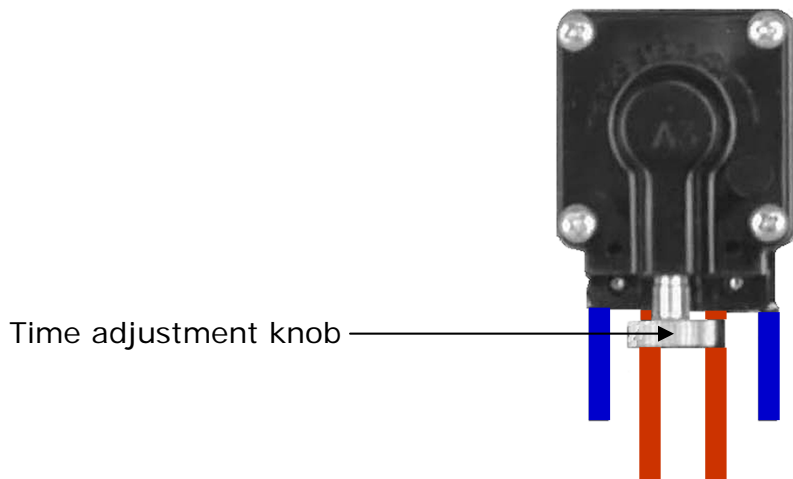

Alarm Controls
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmscontrols.com