

# MODELS TS-15 AND TS-16

## PNEUMATIC TIME DELAY REQUEST TO EXIT STATIONS



**TS-15**  
1.75" Wide



**TS-16**  
Single Gang

Pneumatic time delay operator does not require power for timing function.

- 0.25" Diameter Button with Guard Ring
- One Normally-Open contact pair and one Normally-Closed contact pair
- Contacts rated 10A @ 35VDC
- Time range settable between 2 and 60 seconds
- Switch time is repeatable  $\pm 10\%$
- Switch mounted on a single gang stainless steel electrical plate
- Conforms to UL Standard 294 for Access Control, File Number SA32686
- Temperature range +15°F to +120°F
- Switch depth 2.25" behind plate
- Stainless Steel Plate



*Alarm Controls*  
19 Brandywine Drive  
Deer Park, New York 11729  
(800) 645-5538  
[www.alarmcontrols.com](http://www.alarmcontrols.com)



ASSA ABLOY, the global leader  
in door opening solutions

**INSTALLATION INSTRUCTIONS  
PNEUMATIC TIME DELAY SWITCH  
MODELS TS-15, TS-16**



**UL FILE SA32686**

<b>WIRING</b>		
Wire Color	Designation	Notes
Red	N/C Contacts	Contacts rated 2A @ 28VDC
Blue	N/O Contacts	

**Mounting -**


Unit should be mounted in a vertical position in a 2.5" deep electrical box.

**Time Adjustment -**

Rotate knob clockwise for maximum time (60 seconds).

Rotate knob counter clockwise for minimum time (2 seconds).

Note: Switch time repeatability is  $\pm 10\%$ .

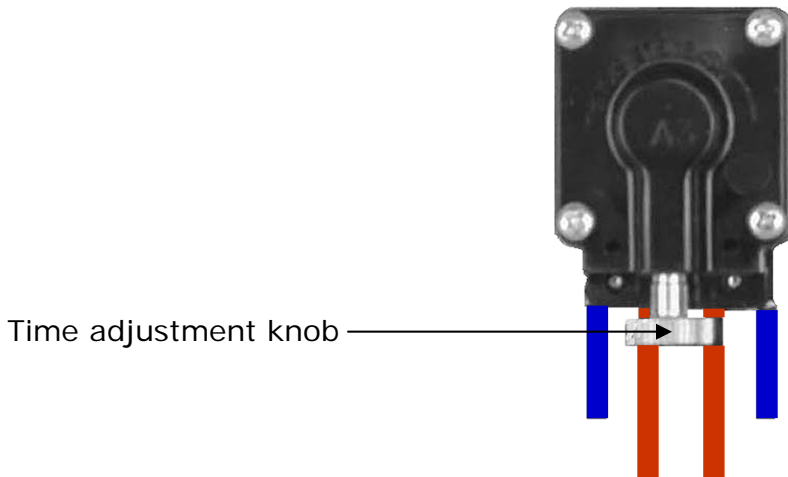

*Alarm Controls*  
19 Brandywine Drive  
Deer Park, New York 11729  
(800) 645-5538  
[www.alarmcontrols.com](http://www.alarmcontrols.com)