

# ENFORCER®

## Mini Programmable Timer

SA-026Q

### Manual



- Adjustable timer from 1~180 seconds via an onboard potentiometer
- Compact size: 1<sup>3</sup>/<sub>16</sub>"x2<sup>3</sup>/<sub>16</sub>"x5<sup>5</sup>/<sub>8</sub>" (30x55x16 mm)
- Operating voltage: 12~24 VAC/VDC
- Relay output: Form C (SPDT), via terminal block
- Contact rating: 3A@24VDC
- Built-in buzzer output: (100mA@24VDC)
- Current draw at 12VDC (max.):
  - Standby 5mA
  - Active 50mA
- Includes double-sided foam mounting tape

### Parts List

- 1x Timer module
- 2x Mounting tape
- 1x Manual


### Specifications

Operating Voltage	12~24 VAC/VDC
Current draw	Standby: 5mA@12VDC Active: 50mA@12VDC
Relay output	Form C (SPDT) terminal block
Buzzer output	100mA@24VDC
Contact rating	3A@24VDC
Operating humidity	0~90%, non-condensing
Operating temperature	-40°~167° F (-40°~75° C)
Dimensions	1 <sup>3</sup> / <sub>16</sub> "x2 <sup>3</sup> / <sub>16</sub> "x5 <sup>5</sup> / <sub>8</sub> " (30x55x16 mm)
Weight	1.4-oz (40g)

### Overview

The ENFORCER SA-026Q is a low-voltage miniature timer module which operates on 12~24 VAC/VDC. It can be used to modify the activation time of a momentary contact switch for 1~180 seconds via a field-adjustable VR (variable resistor) rotary knob. It is ideal for electrical door strikes or electromagnetic locks that do not have a built-in time delay function.

### Sample Application (Fail-Safe Electromagnetic Lock)

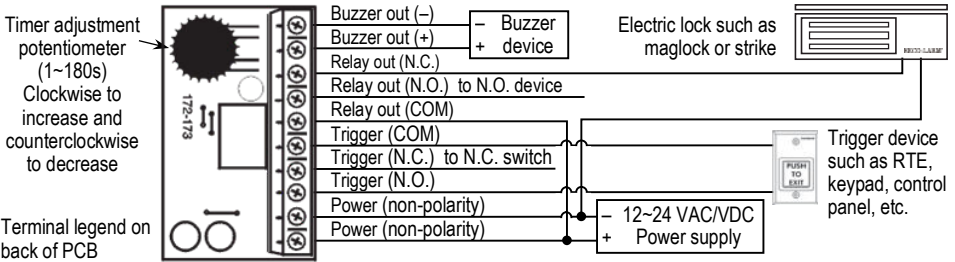

**IMPORTANT:** Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

**California Proposition 65 Warning:** These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**WARRANTY:** This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy, shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

**NOTICE:** The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.

## SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606  
Phone: (949) 261-2999 | (800) 662-0800

Website: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)

 PITSW1  
Order Part# 763-153-5%  
MI\_SA-026Q\_230908.docx