

## HDMI-to-VGA Converter

### MVA-HV01Q

The MVA-HV01Q HDMI-to-VGA Converter allows the user to view video in formats as large as 1920x1080 from HDMI devices on VGA displays. The MVA-HV01Q also has a 3.5mm stereo output allowing the conversion of audio as well.



### Features:


- Converts HDMI to VGA+Audio
- Supports input resolutions up to 1920x1080
- Supports up to 1920x1080 on VGA output
- Stereo audio output
- Plug and play operation



### Specifications:

Supported resolutions	1152x864, 1280x800, 1360x768, 1440x1050, 1440x900, 1680x1050, 1600x1200, 1920x1080
Video input signal	0.5~1Vp-p
DDC Input signal	5Vp-p
Vertical frequency	50/60Hz
Video amplifier bandwidth	1.65Gpbs/165MHz
Power supply	5VDC (USB)
Operating temperature	32°~158° F (0°~70° C)
Operating humidity	5%~95% RH (no condensation)
Dimensions	2 <sup>3</sup> / <sub>8</sub> " x 2 <sup>1</sup> / <sub>8</sub> " x 1 <sup>3</sup> / <sub>16</sub> " (60x54x20 mm)
Weight	1.5oz (43g)

### Dimensions:

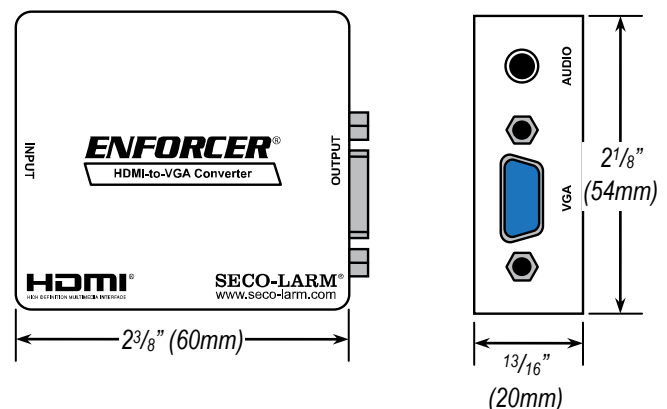

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright 2015 © SECO-LARM U.S.A., Inc. All rights reserved.  
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.  
**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®**