

Stand-Alone / Wiegand Proximity Readers

PR-3123-PQ Mullion
PR-3125-PQ Single-gang

The ENFORCER Stand-alone / Wiegand proximity reader is an advanced security solution that offers both efficiency and convenience. This versatile device can function as a stand-alone controller or a Wiegand reader. The reader's unique feature of adding multiple cards in bulk at once significantly streamlines access control management in large organizations.

Features

- 12~18 VDC Operation
- Low current draw – 120mA max.
- Form C relay output – 2A@12VDC
- Built-in tamper alarm and external alarm output
- Outdoor rated – IP66 weatherproof
- Can serve as Wiegand output reader or controller, output and input – 26~44 bits
- EM 125kHz Proximity card reader
- 2-Door interlock
- Easy duplication of users to additional devices
- Bulk adding of multiple cards at a time

Specifications

| Model | PR-3123-PQ | PR-3125-PQ |
|-----------------------|--------------------------------------|---|
| Operating voltage | 12~18VDC | |
| Current draw (max.) | Standby | 50mA@12VDC |
| | Active | 120mA@12VDC (max.) |
| Outputs | Form C | 2A@12VDC |
| | Alarm | 2A@12VDC |
| | Wiegand | 26~44 bits |
| Inputs | Wiegand | 26~44 bit, PIN input – 4, 8, or 10 bits |
| | Egress | N.O. Ground |
| | Door sensor | N.C. Ground |
| Card type | EM125 | |
| Enclosure material | Black ABS plastic | |
| Operating temperature | -40°~140° F (-40°~60° C) | |
| Operating humidity | 0~98% non-condensing | |
| Dimensions | 17/8"x45/8"x13/16" (48x117x20 mm) | 215/16"x45/8"x13/16" (75x117x20 mm) |
| | Weight | 5-oz (140g) |



PR-3123-PQ



PR-3125-PQ



Compatible Accessories


PR-K1K1-AQ



PR-K1S1-A



Dimensions

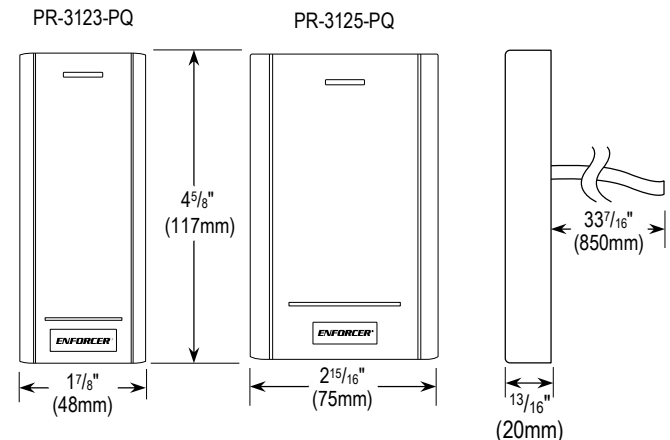

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2024 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_PR-312x-PQ_240820_ML.docx

Lectores de Proximidad Independientes con Wiegand

- PR-3123-PQ** Placa delgado
- PR-3125-PQ** Lector de una sola placa

El lector de proximidad Stand-alone / Wiegand ENFORCER es una solución de seguridad avanzada que ofrece eficiencia y comodidad. Este dispositivo versátil puede funcionar como un controlador independiente o como un lector Wiegand. La característica única del lector de agregar múltiples tarjetas a granel a la vez simplifica significativamente la gestión del control de acceso en organizaciones grandes



PR-3123-PQ



PR-3125-PQ



Funciones

- Operación de 12~18 VCC
- Consumo de corriente bajo: máximo 120 mA
- Salida de relé Form C: 2A@12VCC
- Alarma de sabotaje incorporada y salida de alarma externa.
- Clasificación para exteriores: resistente a la intemperie IP66
- Puede funcionar como lector o controlador de salida Wiegand, con entrada y salida de 26 a 44 bits
- Lector de tarjetas de proximidad EM de 125kHz
- Interbloqueo de 2 puertas
- Duplicación sencilla de usuarios en dispositivos adicionales
- Agregar múltiples tarjetas a granel al mismo tiempo

Especificaciones

| Modelo | PR-3123-PQ | PR-3125-PQ |
|-------------------------------|---|--|
| Tensión de funcionamiento | 12~18VCC | |
| Sorteo actual (max.) | En espera | 50mA@12VCC |
| | Activo | 120mA@12VCC (max.) |
| Salidas | Form C | 2A@12VCC |
| | Alarma | 2A@12VCC |
| | Wiegand | 26~44 bits |
| Entradas | Wiegand | Entrada de PIN de 26 a 44 bits: 4, 8 o 10 bits |
| | Egreso | N.O. Ground |
| | Sensor de puerta | N.C. Ground |
| Salidas | EM125 | |
| Material de cerramiento | Plástico ABS negro | |
| Temperatura de funcionamiento | -40°~140° F (-40°~60° C) | |
| Humedad de funcionamiento | 0~98% sin condensación | |
| Dimensiones | 1 7/8" x 4 5/8" x 1 3/16" (48x117x20 mm) | 2 15/16" x 4 5/8" x 1 3/16" (75x117x20 mm) |
| Peso | 5-oz (140g) | 7-oz (240g) |

Accesorios Compatibles


PR-K1K1-AQ



PR-K1S1-A



Dimensiones

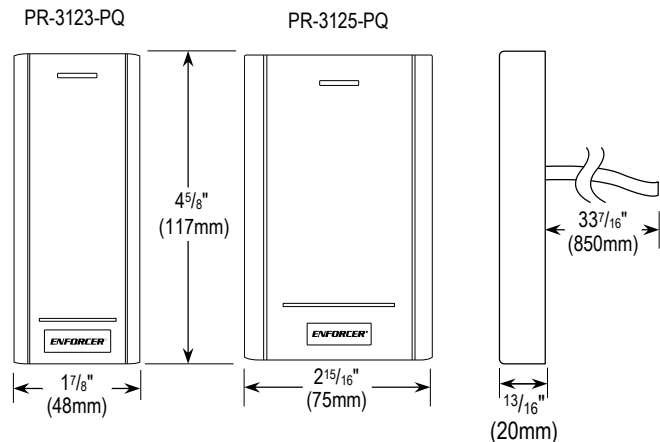

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2024 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_PR-312x-PQ_240820_ML.docx