

## Outdoor Stand-Alone/Wiegand Keypad with Proximity Reader

**SK-2612-SPQ** Keypad and Proximity Card Reader

### Features

- 1,000 Users (up to 987 common, 1 super, 2 duress, and 10 visitors)
- 12~18 VDC Operation
- Low current draw – 150mA max.
- Form C relay output – 2A@12VDC
- Adjustable output – 1~99 seconds or toggle
- Built-in tamper alarm and external alarm output
- Door-propped-open / door-forced-open alarm
- Can serve as Wiegand output reader or controller, output and input – 26~44 bits
- EM 125kHz Proximity card reader
- Easy duplication of users to additional devices
- Bulk adding of multiple cards at a time
- Backlit keypad programmable to ON, OFF, or standby OFF automatically ON with key press
- 2-Door interlock
- Outdoor rated – IP66 weatherproof



12~18  
VDC

IP66


Stand-Alone  
or  
Wiegand

1,000  
Users

### Specifications

<b>Operating voltage</b>		12~18 VDC
<b>Current draw</b>	<b>Standby</b>	60mA@12VDC
	<b>Active</b>	150mA@12VDC (max.)
<b>Outputs</b>	<b>Form C</b>	2A@12VDC
	<b>Alarm</b>	Transistor ground, 2A@12VDC
	<b>Wiegand</b>	26~44 bits
<b>Inputs</b>	<b>Wiegand</b>	26~44 bits, PIN input – 4, 8, or 10 bits
	<b>Egress</b>	N.O. Ground
	<b>Door Sensor</b>	N.C. Ground
<b>Card type</b>		EM 125kHz
<b>Enclosure material</b>		Epoxy-filled black ABS plastic, IP66
<b>Operating temperature</b>		-40°~140° F (-40°~60° C)
<b>Dimensions</b>		1 <sup>15</sup> / <sub>16</sub> "x4 <sup>3</sup> / <sub>4</sub> "x1 <sup>15</sup> / <sub>16</sub> " (49x120x24 mm)
<b>Weight</b>		5.8-oz (165g)

### Dimensions

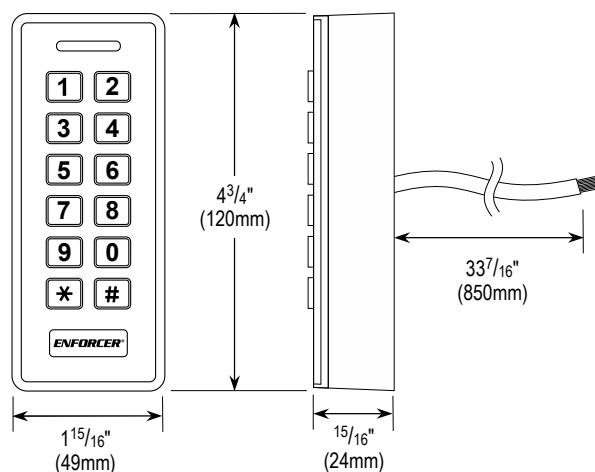

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2025 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PI\_SK-2612-SPQ\_241024\_ML.docx

## Teclado Wiegand Independiente para Exteriores con Lector de Proximidad

**SK-2612-SPQ** Teclado y lector de tarjetas de proximidad

### Funciones


- 1,000 usuarios (hasta 987 comunes, 1 super, 2 de coacción y 10 visitantes)
- Operación de 12~18 VDC
- Bajo consumo de corriente c 150mA máx.
- Salida de relé tipo C – 2A@12VDC
- Salida ajustable – 1~99 segundos o conmutación
- Alarma de manipulación incorporada y salida de alarma externa
- Alarma de puerta abierta/propuesta o puerta forzada abierta
- Puede funcionar como lector de salida Wiegand o controlador, salida y entrada – 26~44 bits
- Lector de tarjetas de proximidad EM 125kHz
- Duplicación fácil de usuarios a dispositivos adicionales
- Adición masiva de múltiples tarjetas a la vez
- Teclado retroiluminado programable para ENCENDIDO, APAGADO o en espera, ENCENDIDO automáticamente con pulsación de tecla
- Interbloqueo de 2 puertas
- Clasificación para exteriores – Resistente a la intemperie IP66



### Especificaciones

Voltaje de operación		12~18 VDC
Consumo de corriente	En espera	60mA@12VDC
	Activo	150mA@12VDC (max.)
Salidas	Tipo C	2A@12VDC
	Alarma	Tierra de transistor, 2A@12VDC
	Wiegand	26~44 bits
Entradas	Wiegand	26~44 bits, entrada de PIN – 4, 8 o 10 bits
	Salida	N.O. Tierra
	Sensor de puerta	N.C. Tierra
Tipo de tarjeta		EM 125kHz
Material de la carcasa		Plástico ABS negro relleno de epoxi, IP66
Temperatura de operación		-40°~140° F (-40°~60° C)
Dimensiones		1 15/16" x 4 3/4" x 1 5/16" (49x120x24 mm)
Peso		5.8-oz (165g)

### Dimensiones

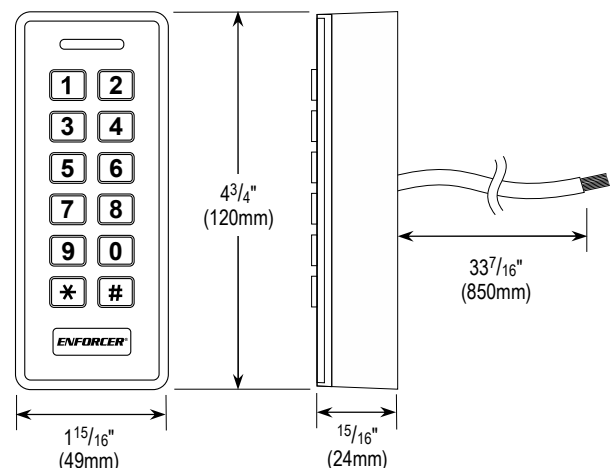

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2025 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PI\_SK-2612-SPQ\_241024\_ML.docx