

AVR-DSV808H

8 CH. 4K UHD DIGITAL
VIDEO RECORDER



H.265 4K UHD DIGITAL VIDEO RECORDER

8MP / 5MP / 4MP / 1080P / 960P / 720P
4K HD OVER COAX & UTP



FUNCTION

- H.265 codec decoding
- Full hybrid to support TVI/AHD/CVI/Analog/960H/IP cameras
- Up to 8MP(4K) resolution for preview and playback
- Support to install up to 1 HDD, max total capacity of up to 16TB
- Full function network remote view via Internet (CMS, IE/Firefox/Chrome, Mac Safari)
- No limitation on adding devices to CMS, max. 128 channels preview (CMSONE)
- Support scan P2P QR code to connect DVR via Mobile app (AVY Mobile One)
- Support to save pictures/video to Dropbox storage (Dropbox)
- Support to save pictures/video to FTP server (built by user)
- VGA/HDMI output up to 4K resolution
- Support HDD S.M.A.R.T. Monitoring
- Ability to convert up to 8 analog channels to have in total 12 IP channels (Total Bandwidth 12mbps)



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.


AVR-DSV808H

8 CH. 4K UHD DIGITAL VIDEO RECORDER



SPECIFICATIONS

DIMENSIONS

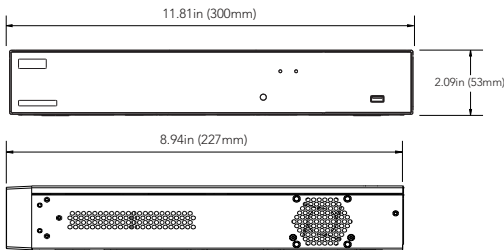

REAR PANEL



AVAILABLE HDD OPTIONS

- 1TB HDD: AVR-DSV808H-1T
- 2TB HDD: AVR-DSV808H-2T
- 3TB HDD: AVR-DSV808H-3T
- 4TB HDD: AVR-DSV808H-4T
- 6TB HDD: AVR-DSV808H-6T
- 8TB HDD: AVR-DSV808H-8T
- 10TB HDD: AVR-DSV808H-10T
- 12TB HDD: AVR-DSV808H-12T
- 14TB HDD: AVR-DSV808H-14T
- 18TB HDD: AVR-DSV808H-18T

MOBILE APP

AVY Mobile One



DESCRIPTION AVR-DSV808H

Analog Video Input	8CH input
IP Video Input	4CH, (only IP up to 12CH)
Total Video Input	12CH, (Analog + IP)
Output	HDMI x 1: EDID / 3840 x 2160(4K) / 2560 x 1440(2K) / 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768 VGA x 1: 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768 BNC x 1: 704 x 576
Incoming Bandwidth (Mbps)	24Mbps~72Mbps
Outgoing Bandwidth (Mbps)	72Mbps
Video Compression	H.264/H.265
Audio Compression	G.711a
Installation Wizard	Yes
HD Analog	8MP @ 15fps / 5MP Lite @ 20fps / 4MP / 1080P / 960P / 720P
IP	8MP / 5MP / 4MP / 1080P / 720P
Playback Frame Rate	8MP:7fps, 5MP:12fps, 4MP:15fps, 1080P/ 720P/ NTSC:30fps(each CH)
Smart AI	Yes
Event Triggers	MD(Sensitivity Level 1~8), Video Loss, Beep, Email, Push Notification to Mobile App
Playback Function	Fast forward / backward (2x, 4x, 8x, 16x), Slow forward (1/2x, 1/4x, 1/8x, 1/16x)
Playback	Max 8CH playback
Local UI	UI5.0
Web Monitoring	IE10/11, Safari V12.1 above, Firefox V.52 above, Chrome V.57 above, Edge V.79 above
Mobile Viewer	AVY Mobile One
Push Notification	Motion Event, AI, and Abnormal
Password Reset	Password reset (Hold 3 seconds), Factory Reset (Hold 8 seconds)
HDD Interface	SATA x 1, Max 16TB HDD
Perimeter	Yes
Intrusion Detection(PID)	Yes
Line Crossing	Yes
Detection (LCD)	Yes
Pedestrian Detection	No
and Vehicle Detection	No
(PD and VD)	No
Stationary Object	No
Detection (SOD)	No
Face detection (FD)	No
Crossing Counting (CC)	No
Rare Sound Detection (RSD)	Yes
Video Tampering (VT)	Yes
License Plate	No
Detection Enhance(LPD)	No
Heatmap(HM)	/
Crowd Density	/
Detection (CD)	/
Queue Length	/
Detection (QD)	/
PoE	N/A
Ethernet	1 RJ45 100/1000 Base-T
USB	USB 2.0 x 1 (Front Panel), USB 2.0 x 1 (Rear Panel)
Audio	8 IN /1 OUT
E-Sata	No
RS485	1
Alarm Input/out	8 IN /1 OUT
OSD Language	English and more
Power Consumption	11W (Without HDD)
Power Supply	DC12V/2A
Working Environment	32°~104°F (0°~40° Celcius)
Working Humidity	Less than 90%RH (Non-Condensing)
Dimensions	11.81" x 8.94" x 2.09" (300mm x 227mm x 53mm)



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606 / 888-833-4611 (Canada Toll-Free)

email: info@avycon.com

social: @avycon_aivo

website: avycon.com