1,200-lb Double-Door Electromagnetic Lock

E-941DB-1K2P Black, with Bond Sensor and Status LED, UL listed

Features

- Multiple UL listings (see chart below)
- 1,200-lb Holding force
- Anodized aluminum housing with black finish*
- 12/24VDC Selectable
- MOV Surge protection
- · Detachable faceplate
- Adjustable mounting bracket
- Complete mounting hardware for typical installations
- L-bracket and Z-brackets available for easy mounting
- Lifetime limited warranty
- Built-in dual-colored status LED and bond sensor to indicate locking status

Green	Door is closed and locked
Red	Door is not closed and/or locked
Off	Door in use / no power

Bond sensor relay rated 1A@30VDC











Specifications

Holding force		1,200-lb (545kg) per door	
Operating voltage		12/24 VDC (selectable)	
Current draw	12VDC	500mA@12VDC per door (1A total)	
	24VDC	270mA@24VDC per door (540mA total)	
Operating temperature		32°~120° F (0°~49° C)	
Weight		21-lb (10kg)	
Bond sensor relay		SPDT 1A@30VDC	
Status LED		Locked (green), unlocked (red)	

UL Listings

UL Designation		Country	E-941DB-1K2P
UL294	Access Control System Units	USA	✓
UL10C	Positive Pressure Fire Test	USA	✓
UL10B	Fire Test of Door Assemblies	USA	✓
ULC-S104	Fire Test of Door Assemblies	Canada	✓

*Also available with aluminum (US 28) finish (E-941DA-1K2P). Contact SECO-LARM or visit www.seco-larm.com for detail.


SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com



Dimensions

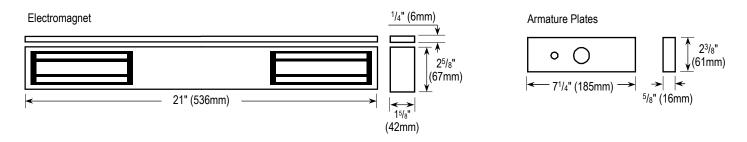

Optional Accessories

For 1,200-lb Black Double-Door Electromagnetic Locks

