




PAR-C5TIR36AWL

5 Megapixel TVI/AHD/CVI, Outdoor Turret, 60' White Light Range, D-WDR, 12VDC, Audio Over Coax (AoC)

Features

- 5 Megapixel Resolution
- Built-in Mic: Audio Over Coax**
- All-in-One Technology (TVI/AHD/CVI)
- Fixed Lens
- True Day/Night with White Light Range up to 60'
- D-WDR
- IP67 Weatherproof
- 2D/3D DNR (Digital Noise Reduction)
- 12VDC Operation
- Up The Cable (UTC) Function
- Through InVid Tech DVR: Free App, CMS & MAC Client
- NDAA Compliant

** With use of Paramount (Version 1.3.8 and above)/ Vision DVRs. TVI Only.

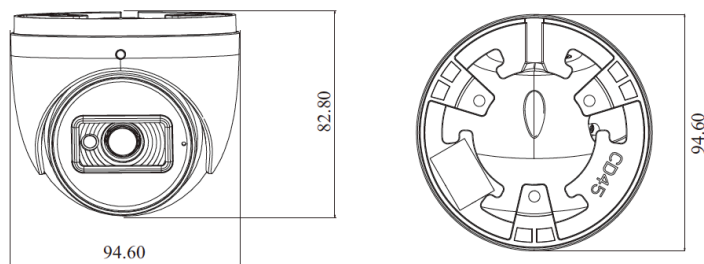

| | |
|--------------------------|--|
| Camera | |
| Image Sensor | 1 / 2.5 "CMOS |
| Resolution | 5MP/4MP |
| Image Size | 2560 x 1936 |
| Video Output | AHD / TVI /CVI |
| Image System | PAL / NTSC |
| Electronic Shutter | Auto |
| White Light Distance | Up to 60' |
| Frame Rate | 5MP@20fps/4MP@30fps |
| Min. Illumination | 0 lux with IR |
| Lens | 3.6 mm |
| Lens Mount | M12 |
| S / N Ratio | ≥52dB (AGC OFF) |
| Ingress Protection | IP 67 |
| Audio | |
| Microphone | Built-in Mic, Audio Over Coax (AoC) (TVI Output Only) |
| Camera audio | TVI/CVI/ Support |
| Audio Sensitivity | -36db |
| Functions | |
| Function Control | OSD (COC Control) |
| Day & Night | ICR |
| Digital WDR | Yes |
| Digital NR | Yes, 2D DNR |
| Global Exposure | Yes |
| Central Exposure | Yes |
| AGC | No |
| Auto White Balance | Yes |
| BLC | Yes |
| Front Light Compensation | No |
| Contrast | Yes |
| Sharpness | Yes |
| Smart IR | No |
| Image Setting | Yes |
| Defect Correction | Auto |
| Language | Chinese and English |
| Angle Adjustment | Pan: 0°~360°; Tilt: 0°~75°; Rotation: 0°~360° |
| Others | |
| Power Supply | DC12V (± 10%) |
| Power Consumption | IR OFF : < 1W; IR ON : <3.5W |
| Working Environment | -22°F ~ 122°F (- 30 °C ~ 50 °C), 10 % ~ 90 % (relative humidity) |
| Dimensions | Φ 3.7 x 3.3 in (Φ 94.6 x 82.8mm) |
| Weight (net) | Approx. .86 lb (0.39KG) |

Ordering Information

PAR-C5TIR36AWL: 5 Megapixel Turret, 3.6mm Lens