



PN1A-16X16-2NH

16 Ch NVR with 16 Plug & Play Ports, 96 Mbps, 2 HD Bays, 4K


Features

- Up to 8 Megapixel Resolution Recording
- 96 Mbps Bit Rate Input
- Supports up to 16 channel simultaneous playback
- Smart Analytic Support
- Local HDMI main monitor output with 4K support
- Local VGA main monitor output up to 1080p
- True P2P Connectivity with QR Code Connect
- Multiple video search options including Smart Search for quick retrieval of footage.
- H.265S/ H.265+/ H.265/ H.264
- 2 Hard Drive Bays
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) to manage multiple units & sites from a single platform
- Free MAC client software to easily manage your system from your Apple computer
- NDAA Compliant

380.00 mm



268.00 mm

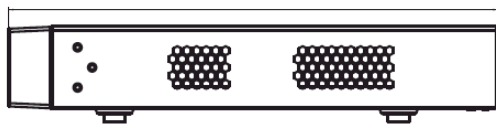

Ordering Information

PN1A-16X16-2NH: 16 Ch NVR with 16 Plug & Play Ports

System	PN1A-16X16-2NH
OS	Embedded Linux
Video	
Network Input	16CH IPC input
Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Output	HDMI × 1: 3840 × 2160 / 1920 × 1080 / 1280 × 1024/ 1024 × 768 VGA: 1920 × 1080 / 1280 × 1024/ 1024 × 768
Compression	H.265S / H.265+ / H.265 / H.264
Audio	
Network Input	16 CH IPC audio input
Local Input	RCA × 1
Local Output	RCA × 1
Compression	G.711(U/A)
Record	
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Frame Rate	NTSC:30fps; PAL:25fps
Playback	
Simultaneous Playback	Max.16 CH
Search	Time slice / time / event / tag / smart search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Decoding Capability	
Live View/ Playback	1CH 8MP; 4CH 1080P
Alarm	
Mode	Manual, sensor, motion, exception, smart events
Input	Supports IPC alarm input
Output	Supports IPC alarm output
Triggering	Record, snap, preset, e-mail, etc.
Network	
Interface	RJ 45 × 1 (10/100/1000Mbps)
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, SNMP, ONVIF, etc.
Incoming/ Outgoing Bandwidth	96Mbps/96Mbps
Client Connection	Max. 10 users access
Video Structure Analysis	
Human/Vehicle Classification	Yes
Other Functions	
Fisheye	No
Plate Recognition	Yes
Mobile Device	
OS	iOS, Andriod
Storage	
HDD Interface	SATA3.0 × 1, up to 18TB
Backup	
Local Backup	USB, USB To HDD (1TB Max)
Network Backup	Yes
Port	
USB	USB 2.0 × 2
Remote Controller	Included
PoE	
PoE Ports	RJ 45 100 Mbps × 16
Standards	IEEE802.3AF/AT
Output Power	≤ 150W
Others	
Power Supply	DC 48V/3.75A
Consumption	≤ 10W (without HDD)
Dimensions (W × D × H)	15 x 10.6 x 1.8In (380 × 268 × 45 mm)
Working Environment	14°F ~ 122°F (-10°C ~ 50°C)10% ~ 90% humidity
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE